PRELIMINARY COPY

INSTRUCTION MANUAL

MODEL 601

ELECTROMETER

KEITHLEY INSTRUMENTS

INSTRUCTION MANUAL

MODEL 601

ELECTROMETER

WARRANTY

We warrant each of our products to be free from defects in material and workmanship. Our obligation under this warranty is to repair or replace any instrument or part thereof (except tubes and batteries) which, within a year after shipment, proves defective upon examination. We will pay domestic surface freight costs.

To exercise this warranty, call your local field representative or the factory, DDD 216-795-2666. You will be given assistance and shipping instructions.

REPAIRS AND RECALIBRATION

Keithley Instruments maintains a complete repair service and standards laboratory in Cleveland, and has an authorized field repair facility in Los Angeles.

To insure prompt repair or recalibration service, please contact your local field representative or the plant directly before returning the instrument.

Estimates for repairs, normal recalibrations, and calibrations traceable to the National Bureau of Standards are available upon request.

KEITHLEY INSTRUMENTS, INC.

This Instruction Manual for the Model 601 is a preliminary edition. It contains all the instructions necessary for operating the instrument. The final edition will contain the maintenance and calibration information.

Please return the warranty card attached to the front cover. We will file this card and send you the final manual by first class mail as soon as it is ready.

12415 EUCLID AVENUE • CLEVELAND OHIO 44106 • (AREA CODE 216) 795-2666

FIGURE 1. Keithley Instruments Model 601 Electrometer.

SECTION 1. GENERAL DESCRIPTION

1-1. GENERAL.

a. The Keithley Model 601 Electrometer is a versatile battery operated instrument which measures wide ranges of dc voltages, currents, resistances and charges. It is a highly refined dc vacuum tube voltmeter that uses an electrometer tube input to provide greater than 10^{14} ohm input resistance. The Model 601 has all the capabilities of conventional VTVMs, but it can also make many more measurements without loading circuits.

b. The Electrometer has nine voltage ranges from 0.001 volt full scale to 10 volts, twenty-eight current ranges from 10^{-14} ampere full scale to 0.3 ampere, twenty-three linear resistance ranges from 100 ohms full scale to 10^{13} ohms, and thirteen coulomb ranges from 10^{-12} coulomb full scale to 10^{-6} coulomb.

c. The Model 601 offers complete line isolation and excellent off-ground measuring capability. Up to 1500 volts may be applied between the input low terminal and the case, and safe operation is assured with the case grounded. A three-terminal input allows complete guarding of the high terminal.

d. The Model 601 employs matched electrometer input tubes followed by three differential transistor amplifier stages and a transistor output stage. A large amount of negative feedback is used for stability and accuracy.

1-2. FEATURES.

a. Voltmeter accuracy is ±1% of full scale, exclusive of noise and drift.

b. Zero drift of the Model 601 is 200 microvolts per hour maximum averaged over any 24-hour period after warm-up. During the 2-hour warm-up, zero drift is no more than 2 millivolts after the first hour.

c. Two amplifier outputs are available. A switch on the rear panel allows either ±1 volt or ±1 milliampere for full-scale meter deflection. The current output is variable ±5% with 1.4-kilohm recorders. The unity-gain amplifier output is equal to the input voltage within 50 ppm or 100 microvolts, exclusive of zero drift.

d. Current measurements can be made by one of two methods: the normal method in which the current is determined by measuring the voltage drop across a resistor shunting the input, or the fast method in which negative feedback is applied through the shunt resistor. The former method minimizes noise. The latter method reduces the input drop and greatly increases the response speed on the low-current ranges.

e. The 1000-hour life of the batteries enables usage in long-term experiments without interruptions for recharging. Battery life is maintained even when the 1-milliampere recorder output is used. For further convenience, battery condition is readily checked on the panel meter.

1-3. SPECIFICATIONS.

AS A VOLTMETER:

RANGE: .001 volt full scale to 10 volts in nine 1x and 3x ranges.

ACCURACY: ±1% of full scale on all ranges exclusive of noise and drift.

ZERO DRIFT: After 1-hour warm-up no more than 2 millivolts in the second hour, and in any subsequent 24-hour period, the average drift will not exceed 200 microvolts per hour.

METER NOISE: ±10 microvolts maximum with input shorted on most sensitive range.

INPUT IMPEDANCE: Greater than 10^{14} ohms shunted by 20 picofarads. Input resistance may also be selected in decade steps from 10 to 10^{11} ohms.

AS AN AMMETER:

RANGE: 10^{-14} ampere full scale to 0.3 ampere in twenty-eight 1x and 3x ranges.

ACCURACY: ±2% of full scale on 0.3 to 10^{-11} ampere ranges using the smallest available Multiplier Switch setting; ±4% of full scale on 3×10^{-12} to 10^{-14} ampere ranges.

METER NOISE: Less than $\pm 3 \times 10^{-15}$ ampere.

GRID CURRENT: Less than 2×10^{-14} ampere.

AS AN OHMMETER:

RANGE: 100 ohms full scale to 10^{13} ohms in twenty-three linear 1x and 3x ranges.

ACCURACY: ±3% of full scale on 100 to 10^{8} ohm ranges using the largest available Multiplier Switch setting; ±5% of full scale on 3×10^{8} to 10^{13} ohm ranges.

AS A COULOMBMETER:

RANGE: 10^{-12} coulomb full scale to 10^{-6} coulomb in thirteen 1x and 3x ranges.

ACCURACY: ±5% of full scale on all ranges. Drift due to grid current does not exceed 2×10^{-14} coulomb per second.

AS AN AMPLIFIER:

INPUT IMPEDANCE: Greater than 10^{14} ohms shunted by 20 picofarads. Input resistance may also be selected in decade steps from 10 to 10^{11} ohms.

OUTPUTS: Unity-gain output and either voltage or current recorder output.

UNITY-GAIN OUTPUT: At dc, output is equal to input within 50 ppm or 100 microvolts, exclusive of zero drift. Up to 0.1 milliampere may be drawn. Output polarity is same as input polarity

VOLTAGE RECORDER OUTPUT: ±1 volt for full-scale input. Internal resistance is 910 ohms. Output polarity is opposite input polarity.

Gain: 0.1, 0.33, etc. to 1000.

Frequency Response (Within 3 db): dc to 100 cps at a gain of 1000, rising to 50 kc at a gain of 3.3, decreasing to 1 kc at a gain of 0.1.

Noise: Less than 2% rms of full scale at a gain of 1000, decreasing to less than 0.5% at gains below 10.

CURRENT RECORDER OUTPUT: ±1 milliampere for full-scale input, variable ±5% with 1400-ohm recorders.

GENERAL:

ISOLATION: Input low to case: greater than 10^{10} ohms shunted by 0.0015 microfarad. Input low may be floated up to ±1500 volts with respect to case.

POLARITY: Meter switch selects left-zero (positive or negative) or center-zero scales. Meter switch does not reverse polarity of outputs.

CONNECTORS: Input: Teflon-insulated triaxial Dage 33050-1. Lo: binding post. Voltage or current output: Amphenol 80-PC2F. Unity gain output, case ground: binding posts.

BATTERY CHECK: Condition of all batteries may be checked with front panel controls.

BATTERIES: Four 2N6 (or 246, VS305 or NEDA 1602); three TR286 (or E286); two RM42R (or E42N or HG42R). 1000 hours battery life.

DIMENSIONS, WEIGHT: 10-1/2 inches high x 6-5/8 inches wide x 10 inches deep; net weight, 14 pounds.

ACCESSORIES SUPPLIED: Model 6011 Input Cable; mating output connector.

1-4. APPLICATIONS.

a. Voltmeter applications include directly measuring potentials across pH electrodes, piezoelectric crystals, capacitors, electro-chemical cells and biological membranes. The Model 601 is also useful as a null detector with potentiometers or bridges in high impedance applications.

b. As a picoammeter the Model 601 can be used with photomultiplier tubes, flame and beta ray ionization detectors, lithium ion drift detectors and gas chromatographs. It is also useful in nuclear studies, plasma physics and vacuum research.

c. As an ohmmeter the Electrometer is ideal for measuring insulation resistance and resistor voltage coefficients. It is useful for measuring "in circuit" resistances, since the Model 601 low terminal can be isolated from case ground. Volume and surface resistivities can be measured with the Model 601 and the Model 6105 Resistivity Adapter.

d. In addition to measuring charge directly other coulombmeter uses are measuring

charge current over a period and obtaining integral curves of time varying currents. The Electrometer can also be used as a charge amplifier to measure piezoelectric crystal outputs.

1-5. ACCESSORIES. (Also see Section 7).

a. Model 6011 Input Cable has 30 inches of low noise triaxial cable with mating triaxial input connector and three alligator clips.

b. Model 6013 pH Electrode Adapter has a 2-foot cable and triaxial connector and accepts Leed & Northrop and Beckman pH electrode connectors. The Adapter allows accurate and convenient pH potential measurements with the Model 601.

c. Model 6301 is a high impedance guarded probe with a 3-foot connecting triaxial cable that allows measurements to be made more conveniently. The Model 6301 has an insulation resistance of over 10^{14} ohms. Using the Probe does not effect any Model 601 specifications.

d. Model 1531 is a gripping probe with a 3-foot connecting triaxial cable. The Model 1531 has an insulation resistance of over 10^{10} ohms.

e. Model 4005 Rack Mounting Kit adapts the Model 601 to rack mounting 10-1/2 inches high x 19 inches wide. The Kit can accommodate two Model 601's side-by-side by using an additional cover.

f. Model 6012 Triaxial-to-Coaxial Adapter permits using the Model 601 with all Keithley electrometer accessories having uhf type coaxial connectors. These include the Models 6102A, 6103A, 6104, 6105, 2501 and 2503. Since circuit low and case ground are connected using the Adapter, the Model 601 should not be floated.

g. Models 6102A and 6103A voltage divider probes, described in Section 7, facilitate measurements and extend the voltage range to 10 kilovolts.

h. Model 6104 Test Shield is suitable for resistance measurements with either 2 or 3-terminal guarded connections, as well as voltage and current tests.

i. Model 6105 Resistivity Adapter is a guarded test fixture for measuring volume and surface resistivities of materials when used with the Model 601 and the Keithley Model 240A High Voltage Supply.

j. Models 2501 and 2503 Static Detector Probes are capacitive voltage dividers with a 10,000:1 ratio, when used with the Probe 3/8 inch from the charged surface.

1-6. EQUIPMENT SHIPPED. The Model 601 Electrometer is factory calibrated and shipped with all components in place. The shipping carton also contains the Instruction Manual, Model 6011 Input Cable and mating output plug.

SECTION 2. OPERATION

2-1. FRONT PANEL CONTROLS AND TERMINALS (See Figure 2)

a. Range Switch. The Range Switch selects the measuring mode and the range. It is divided into a VOLTS position, 11 AMPERES ranges, eight OHMS ranges and four COULOMBS ranges. A line above the dial skirt indicates the range used. Full-scale sensitivity for all ranges is the Range Switch setting times the Multiplier Switch setting. The 10 or 3 of the top meter scale corresponds to the full-scale deflection for the range selected; for example, on the 1-volt range, the needle is at 10 for a 1-volt input.

b. Multiplier Switch. The Multiplier Switch determines the voltage sensitivity of the dc amplifier and sets the full-scale voltage range when the Range Switch is set to VOLTS. The Multiplier Switch may also be used to multiply the AMPERES (3x maximum setting above 10^{-3}), OHMS and COULOMBS ranges on the Range Switch. A line above the dial skirt indicates the range used.

c. METER Switch. The Switch has six positions: the spring-returned BATTERY CHECK position allows checking of the battery condition with the Multiplier Switch. POWER OFF shuts off the instrument. OFF disconnects only the meter during recorder operation. The + and - positions determine the polarity of the meter. CENTER ZERO sets the instrument for center zero operation (lower meter scale).

d. ZERO Controls. Two ZERO Controls are on the front panel: a MEDIUM Switch (outer knob) and a 10-turn FINE potentiometer (center knob). These allow precise meter zeroing.

e. ZERO CHECK Button. Depressing the Button effectively removes all input signal from the instrument by shunting the input and amplifier through 10 megohms. This allows meter zeroing on any range. The Button is locked in the zero check position when the line is horizontal.

f. FEEDBACK Switch. The FAST and NORMAL positions of the Switch determine the feedback connections within the instrument. With the Switch at FAST, current measurements are made with the range resistors in the feedback network; this results in lower input voltage drops and faster response speeds. The FAST position is also used for coulomb measurements, and to increase response speed. When the Switch is in NORMAL, the range resistors shunt the input.

g. INPUT Receptacle. The INPUT Receptacle is a Teflon-insulated triaxial type connector. Its center terminal is the cir-

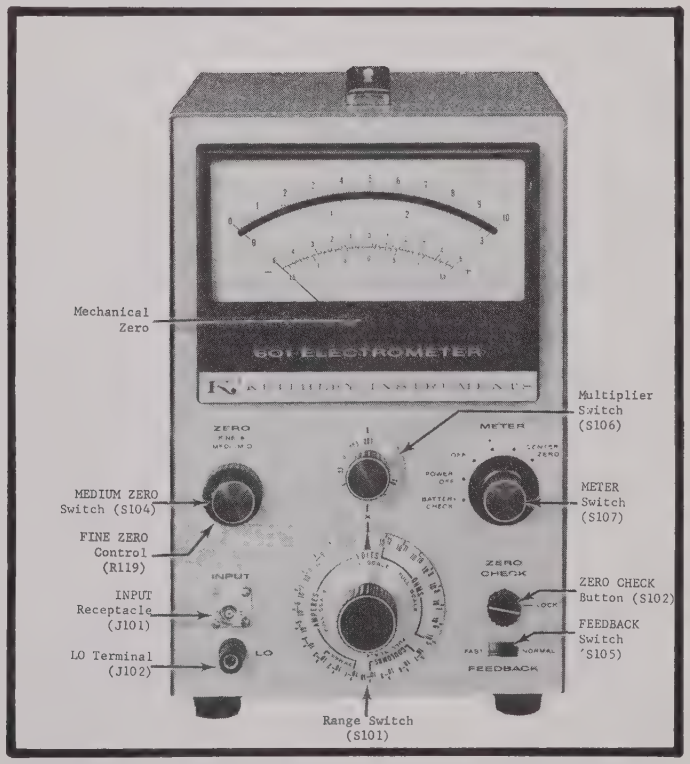

FIGURE 2. Model 601 Front Panel Controls and Terminals. Circuit designations refer to Replaceable Parts List and the Schematic Diagram.

cuit high; the inner shield is circuit low (circuit ground); the outer shield is case ground. (See Figure 4.) A shield cap is provided. The LO Terminal, below the Receptacle, is connected to circuit low; it is connected to case ground only if the shorting link on the rear panel is connected.

2-2. REAR PANEL CONTROLS AND TERMINALS (See Figure 3).

a. COARSE ZERO SWITCH. The COARSE ZERO Switch has 11 positions to extend the zeroing capability of the front panel ZERO Controls.

b. OUTPUT Switch. The Switch is a two-position slide switch for the output. In the 1 MA position, the instrument will drive 1-milliampere recorders. In the 1 V position, the output is 1 volt for full-scale meter deflection. Source resistance is approximately 1000 ohms.

c. 1 MA CAL Control. The Control varies the output from 0.95 to 1.05 milliampere for 1400-ohm recorders, so the recorder scale will correspond with the Electrometer meter.

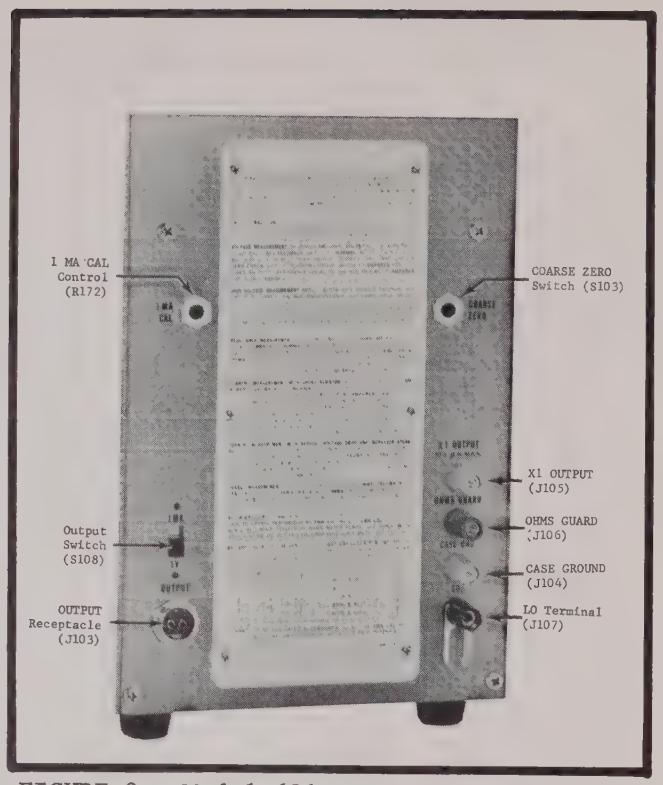

FIGURE 3. Model 601 Rear Panel Controls and Terminals.

d. OUTPUT Receptacle. A 2-terminal microphone-type receptacle provides 1 volt or 1 milliampere for full-scale meter deflection. Pin No. 2 is at circuit low when the FEEDBACK Switch is at NORMAL. Neither terminal is at ground when the FEEDBACK Switch is at FAST. Both terminals are isolated from case ground.

e. X1 OUTPUT and OHMS GUARD Terminals. The potential between the X1 OUTPUT Terminal and the OHMS GUARD Terminal (circuit low when the FEEDBACK Switch is in NORMAL) is equal to the input voltage with 0.005% linearity or 100 microvolts. When the FEEDBACK Switch is at FAST, the X1 OUTPUT Terminal is at circuit low and the OHMS GUARD Terminal is floating.

f. LO Terminal. A black terminal allows connection to the input low connection. Connecting the LO and CASE GROUND Terminals puts both at case ground.

g. CASE GROUND Terminal. A blue terminal is connected directly to the outside cabinet of the Model 601 and the outside shell of the input connector. It is connected to nothing else within the instrument.

NOTE

If the Model 601 will be stored for a long period, remove batteries. Also, make sure the METER Switch is at POWER OFF when the instrument is not being used.

Lead	Circuit	J101 Terminal
heavy wire with red clip cover	Input (circuit) high	Center
thin wire with black clip cover	Input (circuit) low	Inner shield
thin wire with blue clip cover	Case Ground	Outer shield

TABLE 1. Color Coding of Alligator Clips for Model 6011 Input Cable.

2-3. INPUT CONNECTIONS.

a. The accessories described in Section 7 are designed to increase the accuracy and convenience of input connections. Use them to gain the maximum capability of the Model 601.

b. The Model 6011 Input Cable, supplied with the instrument, facilitates input connections. Table 1 contains the color coding of the alligator clips. The high terminal is shielded by the inner braid of the triaxial cable up to the miniature alligator clip. If the unshielded clip causes pick up from near-by electric fields, remove it and connect the shielded lead directly to the source.

NOTE

Techniques and applications are thoroughly discussed in the brochure, Electrometer Measurements, by Joseph F. Keithley. It is available from Keithley Instruments, Inc., or its representatives.

c. Carefully shield the input connection and the source being measured, since power line frequencies are well within the pass band of the Electrometer. Unless the shielding is thorough, any alteration in the electrostatic field near the input circuitry will cause definite meter disturbances.

d. Use high resistance, low-loss materials — such as Teflon (recommended), polyethylene or polystyrene — for insulation. The insulation leakage resistance of test fixtures and leads should be several orders magnitude higher than the internal resistance of the source. Excessive leakage reduces the accuracy of readings from high impedance sources. Triaxial or coaxial cables used should be a low-noise type which employ a graphite or other conductive coating between the dielectric and the surrounding shield braid. Amphenol-Borg Electronics Corporation, Microdot, Inc., and Simplex Wire and Cable Company make satisfactory types. Using the supplied Model 6011 Input Cable is a simple way to insure good input connections.

NOTE

Clean, dry connections and cables are very important to maintain the value of all insulation materials. Even the best insulation can be compromised by dust, dirt, solder flux, films of oil or water vapor. A good cleaning agent is methyl alcohol, which dissolves most common dirt without chemically attacking the insulation. Wash salt solutions with distilled water before using the cleaning agent.

e. Any change in the capacitance of the measuring circuit to low will cause extraneous disturbances. Make the measuring setup as rigid as possible, and tie down connecting cables to prevent their movement. A continuous vibration may appear at the output as a sinusoidal signal, and other precautions may be necessary to isolate the instrument and

the connecting cable from the vibration.

f. For low impedance measurements — below 10^8 ohms or above 10^{-8} ampere — unshielded leads may be used. However, keep the leads short.

g. When measuring currents 10^{-14} ampere or less with the FEEDBACK Switch at FAST, some insulators — such as Teflon — may produce random signals which show up as erratic meter deflections. Insulation used in the Model 601 is carefully selected to minimize these signals.

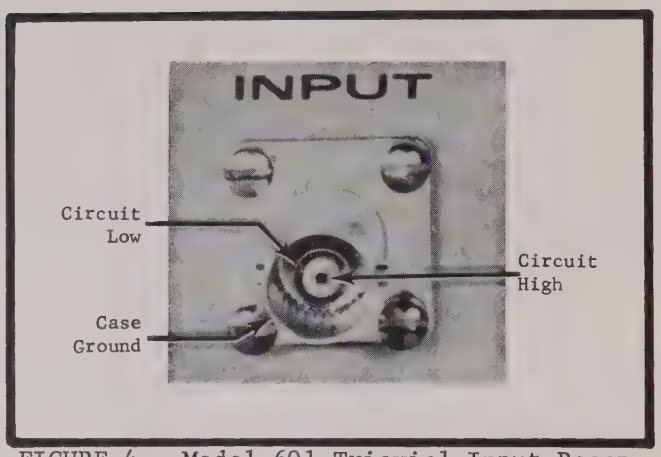

FIGURE 4. Model 601 Triaxial Input Receptacle. The center terminal is circuit or input high; the inner shield is circuit or input low; the outer shield is case ground.

h. It is usually better to connect the Model 601 to the circuit only when a reading is being made. In some cases, the grid current can charge the external test circuitry. One example of this occurs when measuring a capacitor's leakage resistance by observing the decay of the terminal voltage. If the leakage current is less than the grid current, there may be no decay of the terminal voltage when the Electrometer is left connected across the capacitor's terminals.

NOTE

Keep the shielded cap on the INPUT Receptacle when the Electrometer is not in a circuit.

i. The Model 6012 Triaxial to Coaxial Adapter enables using coaxial cables and accessories with the Model 601 by adapting the triaxial INPUT connector to the uhf coaxial type.

NOTE

The Adapter connects circuit low to case ground. Do not float the Model 601 when using the Adapter. The instrument chassis will be at the same potential as the input low.

2-4. PRELIMINARY PROCEDURES.

a. Check battery condition by setting the METER Switch to the BATTERY CHECK position. Rotate the Multiplier Switch through the .001 to 0.1 positions, and observe the meter readings. The meter should read one-half of full scale or more for each Multiplier Switch position. Table 2 shows the batteries checked by position. If the reading for any battery is below half scale, replace all batteries. Note new batteries may cause the Model 601 to drift more than normal for at least 72 hours due to change in battery terminal voltage.

Multiplier position	Battery Checked
.001	B201 & B202
.003	B203
.01	B204 & B205
.03	B206 & B207
0.1	B208 & B209

TABLE 2. Multiplier Switch Positions for Checking Condition of Batteries

b. Set the controls as follows:

METER Switch	POWER OFF
Range Switch	VOLTS
Multiplier Switch	1
FEEDBACK Switch	NORMAL
ZERO CHECK Button	LOCK

c. Turn the METER Switch to CENTER ZERO. Within ten seconds, the meter needle should come to the center zero position. If not, adjust to meter zero with the MEDIUM and FINE ZERO Controls. Normally, there is no need to use the COARSE ZERO Switch.

d. After a few moments increase the voltage sensitivity by advancing the Multiplier Switch to .3, .1, etc. Continue zeroing with the FINE ZERO Control.

e. After long periods of storage or after an overload, the Model 601 may drift excessively. The electrometer tubes are shock mounted; however, a severe jolt to the Electrometer may cause a zero offset. This is corrected with the Zero Controls. Drifting, though, can occur for several hours.

NOTE

If the Model 601 has been stored for some time, the grid current will exceed the specification when first used, then decrease to below the specified amount after one or two hours of use. This is an inherent characteristic of the electrometer tube; the instrument is not faulty.

f. Although the grid current of the Electrometer is much below that found in conventional voltmeters, it can be observed on the meter. A small voltage results from the grid current charging the input capacitance, and the Electrometer appears to drift when the input is open. Use the ZERO CHECK Button to discharge the build-up.

g. Follow the particular procedures in paragraph 2-5 to 2-9 for measuring voltage, current, resistance and charge.

NOTE

Using the center zero scales decreases accuracy 0.5% because the scale span is shorter.

2-5. VOLTAGE MEASUREMENTS.

a. The Model 601 can be used to measure voltages several ways.

1. In the normal method — FEEDBACK Switch at NORMAL — the unknown voltage is connected to the INPUT Receptacle. Input impedance is 10^{14} ohms, 20 pf.

2. To reduce the slowing effects of input capacity, use the fast method to measure the voltage. A guarded circuit is possible this way.

3. To measure low impedance sources, the Model 601 input resistance can be decreased if desired.

4. Accessory probes extend the Model 601's range to 10 kilovolts.

NOTE

Locking the ZERO CHECK Switch places 10 megohms across input high and low, which may temporarily cause instability in some types of high impedance sources.

b. Normal Method Voltage Measurements.

1. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	CENTER ZERO
Range Switch	VOLTS
Multiplier Switch	10
FEEDBACK Switch	NORMAL
ZERO CHECK Button	LOCK

2. Connect the unknown voltage to the INPUT Receptacle; unlock the ZERO CHECK Button. Set the METER Switch to + or -, as necessary. Increase sensitivity with the Multiplier Switch. Recheck zero setting after increasing sensitivity.

3. For off-ground measurements, see paragraph 2-6.

NOTE

For voltage measurements, make sure the Output Switch is set to 1V if the output is not connected. Otherwise, the meter shows a loading effect. When the output is used, this effect is not present.

c. Fast Method Voltage Measurements. This method reduces the slowing effects of input capacity and allows guarded voltage measurements.

1. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	CENTER ZERO
Range Switch	VOLTS
Multiplier Switch	10
FEEDBACK Switch	FAST
ZERO CHECK	LOCK

2. Connect CASE GROUND Terminal to OHMS GUARD Terminal, using the shorting link.

3. Connect the unknown voltage to the high (center) terminal of the INPUT Receptacle and to the CASE GROUND Terminal on the rear panel. Use the LO Terminal as a guard between circuit high and low. Unlock the ZERO CHECK Button. Set the METER Switch to + or -, as necessary. Increase sensitivity with the Multiplier Switch. Recheck zero setting after increasing sensitivity.

4. To make off ground voltage measurements, see paragraph 2-6.

d. Low Impedance Measurements. To decrease input resistance, set the Range Switch to one of the AMPERES ranges. The input resistance is now the reciprocal of the current range. For instance, to obtain an input resistance of 10^7 ohms, set the Range Switch to the 10^{-7} AMPERES range. Set the full-scale voltage range with the Multiplier Switch. Operating procedures are the same as subparagraph b. At lower input resistances, the Model 601 will not run off scale as easily in the presence of excessive ac fields. This occurs only when the input is left open.

e. To measure sources more than 10 volts, use one of two divider probes. The Model 6102A 10:1 Divider Probe extends the Model 601's range to 100 volts; overall accuracy is ±3% and input resistance is 10^{10} ohms. The Model 6103A 1000:1 Divider Probe extends the Model 601's range to 10 kilovolts; overall accuracy is ±5% and input resistance is 10^{12} ohms. Follow the same operating procedures with the dividers as in subparagraph b. The Model 6012 Triaxial-to-Coaxial Adapter must be used with the Models 6102A and 6103A Divider Probes. Note, however, using the Adapter connects circuit low to case ground; do not float the Electrometer. The full-scale voltage range is the divider ratio times the Multiplier Switch setting.

NOTE

Operating the Model 601 more than 1500 volts off ground may permanently damage the instrument. Isolation between circuit low and ground may break down somewhere in the circuit, putting the case at an off-ground potential. Since these breakdowns are very difficult to locate, it might not be possible to float the instrument safely again.

2-6. OFF GROUND VOLTAGE MEASUREMENTS.

a. The Model 601 can measure an unknown voltage whose low is up to 1500 volts off ground while its own case is at ground. This allows safe operation of the Electrometer. Its operation is the same as given in paragraph 2-5, except for input connections and some added cautions. These differ, depending upon the FEEDBACK Switch setting.

1. FEEDBACK Switch set to NORMAL. Disconnect the shorting link between the LO and CASE GROUND Terminals on the rear panel. Make sure the Model 601 case is securely connected to an earth ground, and that the low of the unknown voltage is less than 1500 volts off ground. Connect the unknown voltage directly to the INPUT Receptacle. Operate the Model 601 as described for normal method voltage measurements.

2. FEEDBACK Switch set to FAST. Do not use the shorting link. Make sure the Model 601 case is securely connected to an earth ground, and that the low of the unknown voltage is less than 1500 volts off ground. Ground the outer shield of the INPUT Receptacle. Connect the high of the unknown voltage to the center terminal of the INPUT Receptacle. Connect the low to the GUARD Terminal. Use the inner shield of the INPUT Receptacle as a guard. Operate the Model 601 as described for fast method voltage measurements.

NOTE

When the Model 601 is off ground, make sure the shell of a mating plug to the OUTPUT Receptacle is not connected to either pin in the Receptacle.

b. If the Model 6012 Adapter is used, do not float the Model 601. The Adapter connects the input low to the case ground, so that the Model 601 chassis and controls are at the same potential as the low of the unknown source.

NOTE

Use only an insulated blade screwdriver to adjust the COARSE ZERO Switch and 1 MA CAL Control when floating the Model 601. An ordinary screwdriver could short the circuit low to case ground, creating a shock hazard and damaging the external circuitry.

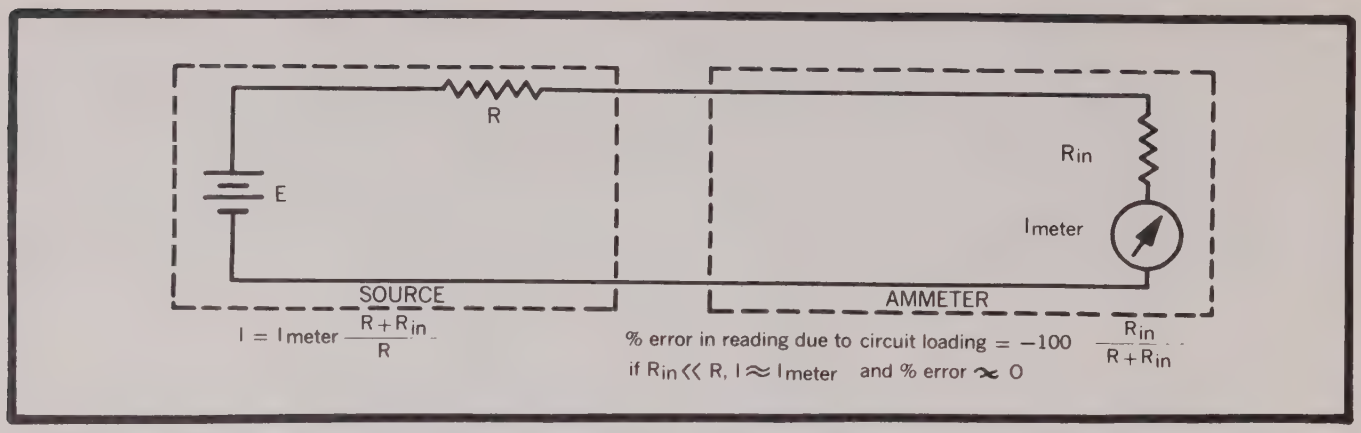

FIGURE 5. Ammeter Circuit Loading. Current sources may be considered a voltage (E) in series with a resistance (R). The current with no ammeter attached is I=E/R. When an ammeter is attached to measure the current, the effective input resistance of the ammeter R_{in} is in series with the source resistance (R). The current in the complete circuit is less and $I_{meter} = E/(R + R_{in})$. If the effective ammeter input resistance is small compared to R, $I_{meter} \approx I$ and the error introduced by circuit loading is negligible.

2-7. CURRENT MEASUREMENTS.

a. The Model 601 can measure currents three ways.

1. In the normal method — used on any range — the current is determined by measuring the voltage drop across a resistor shunting the amplifier input. This method is useful when lower noise is more important than faster response speeds or if some damping is needed.

2. In the fast method — for use only below the 10^{-5} ampere range — the shunt resistor is between the amplifier output and input in the feedback loop. This circuit largely neutralizes the effect of input capacity and greatly increases the response speed. Also, the input voltage drop is reduced to a maximum of one millivolt on any range.

3. For galvanometric current measurements, the Model 601 acts as a null indicator between a very accurate current source and the unknown current source. Its off ground operating capability makes it ideal for this application since the reference source and unknown may both have a common grounded terminal.

b. Rise time varies primarily with the current range, the input capacity and the method used. On most ranges, the rise time in the fast mode is less than one second with 50 picofarads across the input. Even with much larger shunt capacities, the negative feedback maintains a short rise time. Given a choice, it is better to place the Electrometer nearer to the current source than to the data reading instrument. Transmitting the input signal through long cables greatly decreases the response speed and increases noise due to the cable capacitance.

c. To measure from a source with both terminals off ground in either method, remove the link between the LO and CASE GROUND Terminals on the rear panel. Connect the unknown current to the INPUT Receptacle. The source must be less than ±1500 volts off ground (see paragraph 2-6).

d. Normal Method (0.3 to 10^{-14} ampere ranges).

1. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	CENTER ZERO
Range Switch	10^{-1} AMPERES
Multiplier Switch	1
FEEDBACK Switch	NORMAL
ZERO CHECK Button	LOCK

Connect the unknown current to the INPUT Receptacle and unlock the ZERO CHECK Button. Set the METER Switch to + or -, as necessary. Increase the sensitivity with the Range Switch and the Multiplier Switch. Do not set the Multiplier Switch higher than 3 for Range Switch settings 10^{-3} and above. Check zero with the ZERO CHECK Button.

2. The full-scale current range is the Range Switch setting times the Multiplier Switch setting. Use the smallest Multiplier Switch setting possible to minimize input voltage drop and thus obtain the best accuracy. The input resistor varies with the Range Switch setting, from 10 ohms at 10^{-1} AMPERES to 10^{11} ohms for 10^{-11} AMPERES. The input voltage drop is the meter reading times the Multiplier Switch setting.

NOTE

On the low current ranges, balance out the grid current with the Zero Controls or subtract the value from the reading. To find the amount of grid current, cap the INPUT Receptacle and read the meter.

e. Fast Method (ranges below 10^{-5} ampere).

1. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	CENTER ZERO
Range Switch	10^{-6} AMPERES
Multiplier Switch	1
FEEDBACK Switch	FAST
ZERO CENTER Button	LOCK

Connect the unknown source to the INPUT Receptacle and unlock the ZERO CHECK Button. Set the METER Switch to + or -, as necessary. Increase the sensitivity with the Range Switch and the Multiplier Switch. Do not set the Range Switch to 10^{-5} AMPERES or higher. Check zero with the ZERO CHECK Button.

NOTE

Use only the ZERO CHECK Button to check zero for the fast method. Do not short the input, because this will remove the feedback from the circuit.

2. The full-scale current range is the Range Switch setting times the Multiplier Switch setting. When selecting the Multiplier Switch setting, remember small settings permit lower current source resistance, and larger settings improve instrument zero stability. Check the caution in subparagraph 3a below.

3. With the fast method, the input drop is reduced and the response speed is increased at least 100 times. However, follow these precautions:

a) The internal impedance of the unknown current source should not be less than 0.1 of the value of the feedback resistor being used. Otherwise, adequate feedback voltage cannot be developed at the input, and zero instability results. The feedback resistor value is the reciprocal of the AMPERES range of the Range Switch. Also, the voltage drop across the current source should be at least 100 times the voltage drop across the Model 601.

b) The low side (Pin No. 2) of the OUTPUT Receptacle is no longer connected to the low side of the INPUT Receptacle. Therefore, do not allow the low side of a recorder to be electrically connected, such as through the ground lead of a power cord, to the low side of the current source. Another alternative is using the unity-gain output. (See paragraph 2-11.)

c) Do not use the fast method to measure capacitor unless using a very stable voltage supply. Connecting a capacitor to the input changes the circuit to a differentiator, resulting in extreme sensitivity to very small voltage transients.

f. Galvanometric Method.

1. Operate the Model 601 as a picoammeter in the fast method of operation. Use an accurate reference current source to buck out the unknown current source. Connect as shown in Figure 6.

2. Set the METER Switch to CENTER ZERO and use the higher current ranges. Adjust the buckout current to indicate null on the Model 601. Increase the Electrometer's sensitivity as needed. When the Model 601 is as close to null as possible, the known reference current source equals the unknown source ± the Model 601 current reading.

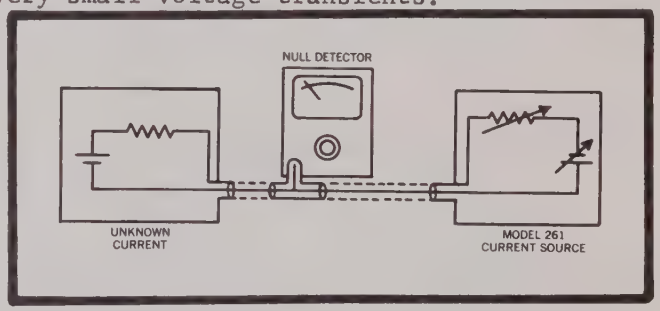

FIGURE 6. Measuring Current by the Galvanometric Method. Use an accurate reference current source to buck out the unknown current source, I_x. The Model 601, on its current ranges, serves as a null detector. Use a uhf-tee fitting and Model 6012 Adapter at the Model 601 input. Connect the Electrometer to the two sources with coaxial cable. Select cable carefully for very low currents (see paragraph 2-3). For off ground measurements, use triaxial cable and connectors, grounding the outer shield.

2-8. RESISTANCE MEASUREMENTS.

a. The Model 601 can measure resistances by three methods.

1. In the normal or two-terminal method (ammeter-voltmeter), the Electrometer measures the voltage drop across the unknown sample as a known, constant current flows through it. The voltage drop is proportional to the resistance of the sample. This method is the simplest for the 100 to 10^{11} ohm ranges.

2. Above 10^{11} ohms or to prevent leakage, the guarded method is better. It results in faster response speeds and also nullifies leakage errors across the Electrometer input, since the potential across the input terminal is small.

3. In the preceding methods, the voltage across the sample cannot be arbitrarily set. In some cases, as in measuring capacitor leakage, these methods involve much more

time than if a larger voltage could be applied. In the external voltage method the Model 601 is used as a fast picoammeter. The unknown resistance sample is connected to an external known voltage source and the current through the sample is measured. Either the normal or fast method may be used. The resistance is calculated from the readings.

NOTE

Discharge any capacitor before removing it from the circuit. Depressing the ZERO CHECK Button shorts the input through a 10-megohm resistor, providing a discharge path.

b. Normal Method (100 to 10^{11} ohm ranges).

1. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	+
Range Switch	10^5 OHMS
Multiplier Switch	1
FEEDBACK Switch	NORMAL
ZERO CHECK Button	LOCK

Connect the resistance sample to the INPUT Receptacle. Unlock the ZERO CHECK Button. Check zero with only the ZERO CHECK Button.

NOTE

Do not open circuit the Electrometer on the OHMS ranges; the input will develop up to 10 volts due to its constant current characteristic. Keep the input shorted or the ZERO CHECK Button locked.

2. The full-scale ohms range is the Range Switch setting times the Multiplier Switch setting. Use the largest Multiplier Switch setting possible to obtain the best accuracy.

3. Before making a final reading, manipulate the Multiplier and Range Switches, so the sample is tested at a number of test potentials. The applied test voltage is the meter reading times the Multiplier Switch setting.

4. When the test current is applied, high terminal of the INPUT Receptacle is negative.

NOTE

Shield the input if the resistance sample exceeds 10^8 ohms.

c. Guarded Method (to 10^{14} ohm ranges).

1. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	+
Range Switch	10^{11} OHMS
Multiplier Switch	1
FEEDBACK Switch	FAST
ZERO CHECK Button	LOCK

Connect the low impedance side of the resistance sample to the Model 601 GUARD Terminal, and the high impedance side to the center terminal of the INPUT Receptacle. Unlock the ZERO CHECK Button.

2. Read the resistance as outlined for the normal method, subparagraph b.

3. The low terminal of the INPUT Receptacle is now a driven guard. It may be used to minimize the slowing effects of capacity between high and low and errors due to leakage resistance between high and low.

4. The Model 6011 Input Cable, supplied with the Model 601, provides a convenient means of making guarded resistance measurements. Connect the shorting link between the CASE GROUND and GUARD Terminals on the rear panel. This allows the CASE GROUND or blue test lead terminal to be connected to the low impedance side of the unknown resistance. The inner shield or the black test clip is the GUARD Terminal.

d. External Voltage Method (to 10^{17} ohms).

1. Turn the ZERO CHECK Switch to LOCK. Connect the sample between the High Terminal of the INPUT Receptacle and the power supply. (See Figure 7.) Put a switch in the high voltage line to ground the low impedance end of the sample when it is disconnected from the potential. Before disconnecting, make sure to lock the ZERO CHECK Button. If the Power Supply must be floating, remove the link between the CASE GROUND and LO Terminals and connect the CASE GROUND Terminal to an earth ground.

2. Set the FEEDBACK Switch to NORMAL. Usually this method is best, since instabilities can arise for resistance samples less than 0.1 the value of the feedback resistor.

3. Apply a potential to the sample before releasing the ZERO CHECK Button. Set the Range Switch to .3 AMPERES and increase sensitivity until a reading is obtained.

4. If the potential applied is at least 100 times the full-scale input drop (Multiplier Switch setting), the resistance is equal to the applied potential divided by the current reading. The high voltage sensitivity of the Model 601, therefore, permits external voltages of 0.1 volt or more to be used.

5. If the potential applied is less than 100 times the input drop, the resistance is equal to the difference between the applied potential and the input drop, all divided by the current reading.

6. If the current is read by the fast method, the input drop is so slight that it need not be included in the calculation. If the capacity shunted across the sample is large, such as encountered in capacitor leakage measurements, the fast method increases response speed and this connection is recommended.

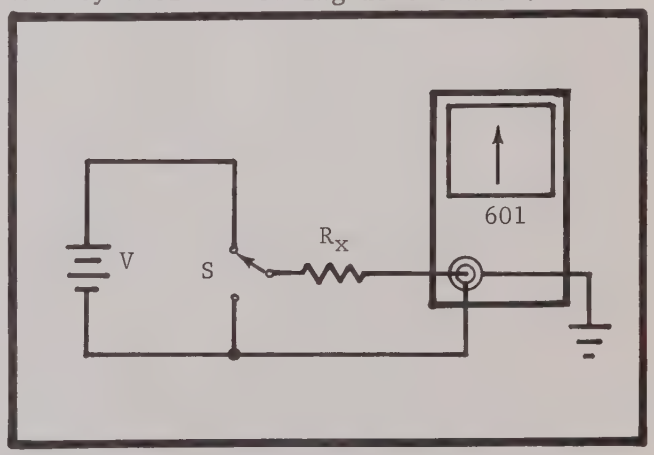

FIGURE 7. Measuring Resistance by the External Voltage Method. A potential from a known source, V, is applied to the unknown resistance sample, R_x. The Model 601 measures the current through R_x, from which the resistance is calculated. Switch S grounds R_x when no potential is applied. Note in above figure the power supply is floating.

2-9. CHARGE MEASUREMENTS.

a. Follow the instructions of paragraph 2-4. Set the controls as follows:

METER Switch	CENTER ZERO
Range Switch	10^{-7} COULOMBS
Multiplier Switch	.01
FEEDBACK Switch	FAST
ZERO CHECK Button	LOCK

Unlock the ZERO CHECK Button and then connect the unknown source to the INPUT Receptacle. If the Electrometer reads off scale, increase the Multiplier Switch setting. If the sensitivity is not enough, decrease the Multiplier Switch setting until the reading is on scale. Changing the Multiplier Switch setting does not affect the transfer of charge from the unknown source to the instrument. If increasing sensitivity with the Multiplier Switch does not bring the reading on scale, increase sensitivity with the Range Switch and repeat the above steps.

b. The full-scale charge range is the Range Switch setting times the Multiplier Switch setting. Grid current contributes 2×10^{-14} coulomb per second maximum.

NOTE

Because of the instrument's RC time constant, wait 20 seconds after discharging internal capacitance on the 10^{-7} coulomb range before making another measurement. On the 10^{-8} coulomb range, wait at least two seconds.

2-10. RECORDER OUTPUTS.

a. For recording with the Model 601, use the Keithley Model 370 Recorder for ease, economy, versatility and performance. The Model 370 is a pen recorder with 10 chart speeds and 1% linearity. It can float up to ±500 volts off ground. The Model 370's input cable has a connector which mates directly with the OUTPUT Connector on the Model 601; this avoids interface problems often encountered between a measuring instrument and a recorder. No special wiring is needed. No recorder preamplifier is required.

b. Other recorders, oscilloscopes and similar instruments can be used with the Model 601. The Model 601 has two variable outputs, ±1 volt and ±1 milliampere, to amplify signals within 1/2% for recorders, oscilloscopes and similar instruments. These can be used on all ranges of the Model 601.

NOTE

The Model 601 may be used with the FEEDBACK Switch in FAST position with other instruments. However, make sure there is no common ground between low terminals of the Electrometer and the other instrument.

c. 1-Volt Output. Connect oscilloscopes and pen recorder amplifiers to the OUTPUT Receptacle. Pin no. 1 is the negative terminal and pin no. 2 is grounded when the FEEDBACK Switch is set to NORMAL. Set the OUTPUT Switch to 1 V. The Model 601 output is now ±1 volt for full-scale meter deflection on any range. Internal resistance is 910 ohms. The frequency response (±3 db) is dc to 200 cps at a gain of 1000, rising to 50 kc at a gain of 3.3, and decreasing to 1 kc at a gain of 0.1. Noise is less than 2% rms of full scale at a gain of 1000, decreasing to 0.5% at gains below 10. The METER Switch does not reverse the output polarity.

NOTE

Neither terminal of the OUTPUT Receptacle should be at case ground potential if the instrument is used off ground. Make sure the shell of any mating plug is not connected to either terminal in the Receptacle. The shorting link should not be connected between LO and CASE GROUND. Use a recorder with an input isolated from ground when making off ground measurements.

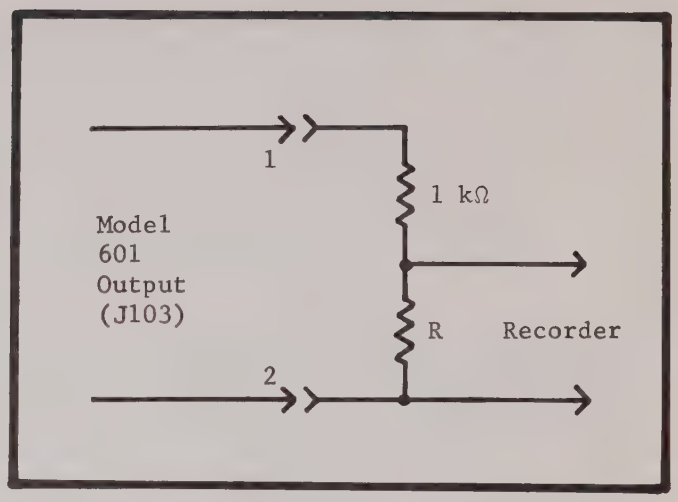

FIGURE 8. Divider Circuits Across Model 601 Output for Driving 50 and 100-Millivolt Recorders. Use 1% resistors in the dividers for 50-millivolt recorders, resistor R is 50Ω; for 100-millivolt, R is 100Ω.

b. 1-Milliampere Output. Connect 1-milliampere instruments to the OUTPUT Receptacle. Pin no. 1 is the negative terminal. Set the OUTPUT Switch to 1 MA. The output is approximately 1 milliampere for full-scale meter deflection on any range. For exact output, adjust the meter on the .003-volt range with the FINE ZERO Control for full-scale deflection. Then adjust the 1 MA CAL Control until the recorder reads full scale. Check the recorder and meter zero and repeat adjustment if necessary. The METER Switch does not reverse the output polarity. Use only an insulated screwdriver to adjust the COARSE ZERO Switch and the 1 MA CAL Control.

c. For servo rebalance recorders, use a divider across the Model 601 OUTPUT Receptacle. See Figure 8. Set the OUTPUT Switch to 1 MA. Use the 1 MA CAL Control to trim the output for full-scale recorder deflection. Operation is the same as for current outputs.

d. When the FEEDBACK Switch is in the NORMAL position, the negative side of the output terminal is grounded to the LO Terminal. Therefore, no difficulty will be experienced using oscilloscopes and recorders with the Model 601 set for normal operation. In FAST position, however, neither side is grounded. If this is used, make sure there is no common ground between the recorder or oscilloscope and the Model 601 LO Terminal, or use the unity-gain output.

2-11. UNITY GAIN OUTPUT. The unity-gain amplifier can be used as an impedance matching device to minimize circuit loading errors or for convenient connections to a recorder when the FEEDBACK Switch is in FAST position.

a. The unity-gain output is equal to the input within 50 ppm or 100 microvolts when the load resistance is 100 kilohms or better below 10 volts. By placing the Model 601 between a 10^{10} ohm source, for example, and a 0.01% voltmeter with a 1-megohm input resistance, overall accuracy better than 0.025% can be achieved.

1. Connect the voltmeter to the X1 OUTPUT and GUARD Terminals as shown in FIGURE 6. The GUARD Terminal is connected to LO Terminal with the FEEDBACK Switch in NORMAL. Maximum output amplitude is 10 volts peak-to-peak.

2. Adjust the Model 601 Zero Controls to obtain a zero-voltage reading on the instrument using the unity-gain output. Make sure the latter's sensitivity is high enough

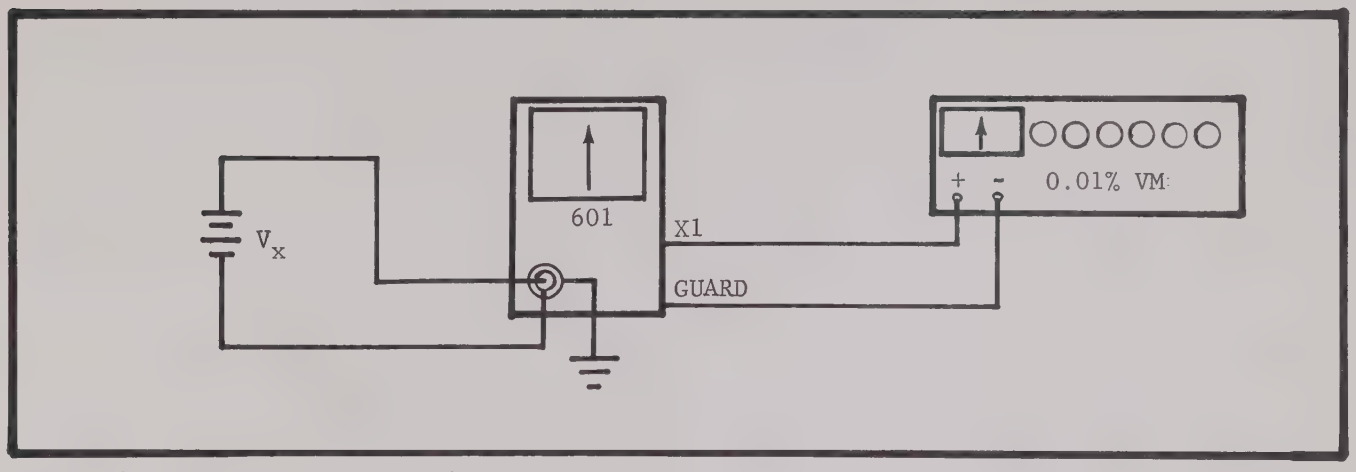

FIGURE 9. Measuring Potential of High Resistance Source with 0.025% Accuracy. The Model 601 is used between a high-resistance source, V_x, and a 0.01% voltmeter to obtain high accuracy without causing circuit loading. The digital voltmeter or, as above, the Keithley Model 662 Differential Voltmeter connects to the Model 601 unity-gain terminals.

for a precise zero adjustment. This adjustment is necessary because a slight zero shift may occur when the Model 601 is changed from the 0.1-volt range or lower to a range above 0.1 volt. The shift, caused by a gain-reducing network switched in by the amplifier on the 1-volt and higher ranges, is too slight to be read on the meter, but it can cause an error in accurate measurements using the unity-gain output.

b. When the FEEDBACK Switch is in FAST position, the unity-gain terminals permit more convenient connections to recorders without special precautions. In this mode, the X1 OUTPUT Terminal is grounded and the GUARD Terminal delivers a full-scale output equal to the Multiplier Switch setting times the input signal.

SECTION 3. APPLICATIONS

3-1. GENERAL. This Section discusses ways of using the Model 601 Electrometer. The versatility of the Model 601 is such that it is almost a complete dc laboratory in itself. Some particular applications are considered. The purpose of these is to suggest uses and techniques to increase the usefulness of the Model 601.

3-2. CURRENT SOURCE. The Model 601 can be used as a ±4% current source from 10^{-5} to 10^{-11} ampere. Follow these procedures:

a. Set the FEEDBACK Switch to NORMAL, the Range Switch to OHMS and the METER Switch to + or -.

b. The current supplied at the INPUT Receptacle is the reciprocal of the OHMS Setting on the Range Switch. (For example, 10^{9} OHMS indicated 10^{-9} ampere current at the INPUT Receptacle.)

c. The Multiplier Switch does not affect the current at the INPUT Receptacle. It does affect the maximum input voltage drop, which is equal to the Multiplier Switch setting. For accurate output current, check the meter zero on the .01-volt range.

3-3. STATIC CHARGE MEASUREMENTS. Electrometers are very sensitive to static charges and can readily make qualitative or quantitative measurements.

a. Zero the Model 601; set the FEEDBACK Switch to NORMAL and the Range Switch to VOLTS (10 volts full scale). Bring the charged object near the uncovered, unshielded INPUT Receptacle. Depending upon the distance between the charge and the instrument, a voltage will be induced on the input terminals which can be read on the meter. Check zero frequently, since accumulation of charge due to the electrometer tube grid current will cause a slow drift of the input voltage.

b. Connecting a capacitor across the input reduces the drift due to grid current and also the sensitivity to charge. Therefore, with the FEEDBACK Switch in NORMAL, set the Range Switch to COULOMBS position. The capacitor value connected across the input in farads is equal to the COULOMBS Range.

3-4. CAPACITANCE MEASUREMENTS. The Model 601 can measure capacitance from 500 picofarads to 100 microfarads. The Electrometer charges the capacitor to a known potential and then measures the charge. The resulting capacitance is easily figured.

a. Charge the capacitor as follows:

1. Set the Model 601 front panel controls to:

METER Switch	+
Range Switch	VOLTS
Multiplier Switch	.001 to 10
FEEDBACK Switch	NORMAL
ZERO CHECK Button	LOCK

2. Connect the unknown capacitor to the INPUT Receptacle. Unlock the ZERO CHECK Button and charge the capacitor to a known voltage by setting the Range Switch to the

OHMS ranges. As the capacitor charges, the meter will advance up scale to show the voltage (meter reading times the Multiplier Switch setting) across the capacitor at any given time.

3. Charge the capacitor to a convenient voltage, such as 0.1, 1, etc. Charge large capacitors to a lower voltage than that used for low-value capacitors. The OHMS ranges control the charging rate: start with the lower ranges and increase the setting as the voltage across the capacitor reaches the desired value.

4. When the capacitor reaches the desired value, quickly set the Range Switch to the VOLTS position. Disconnect the capacitor from the INPUT Receptacle. Or, if more convenient, disconnect the capacitor first and then set the Range Switch to VOLTS.

b. Measure the charge on the capacitor following the instructions in paragraph 2-8.

c. The value of the unknown capacitance is the stored charge divided by the initial voltage:

$$C \text{ (farads)} = \frac{Q \text{ (coulombs)}}{V \text{ (volts)}}$$

3-5. CURRENT INTEGRATOR. The Model 601 works as an integrator for time-varying currents. Figure 10 shows the circuit. Set the Range Switch to COULOMBS. Use the unity-gain output. Output voltage, V_{out}, is

$$V_{out} = \frac{1}{C} \int i \, dt$$

where C is the coulomb range setting in farads.

3-6. POTENTIOMETRIC VOLTAGE MEASUREMENTS. The floating capability, high input impedance, 1-millivolt sensitivity and low zero drift make the Model 601 useful as a null detector in potentiometric voltage measurements. The circuit shown in Figure 11 is useful when no loading of the source voltage, on or off null, can be tolerated. Make the measurements with the center zero scale, following the procedures in paragraph 2-6. When the Model 601 is at null — no meter deflection — the voltage from the known source equals the unknown voltage.

3-7. MEASURING DIODE CHARACTERISTICS. The Model 601 can accurately measure diode characteristics in one simple step without using any other equipment. The circuit is shown in Figure 12. The measurements are made on the OHMS ranges, selecting constant currents down

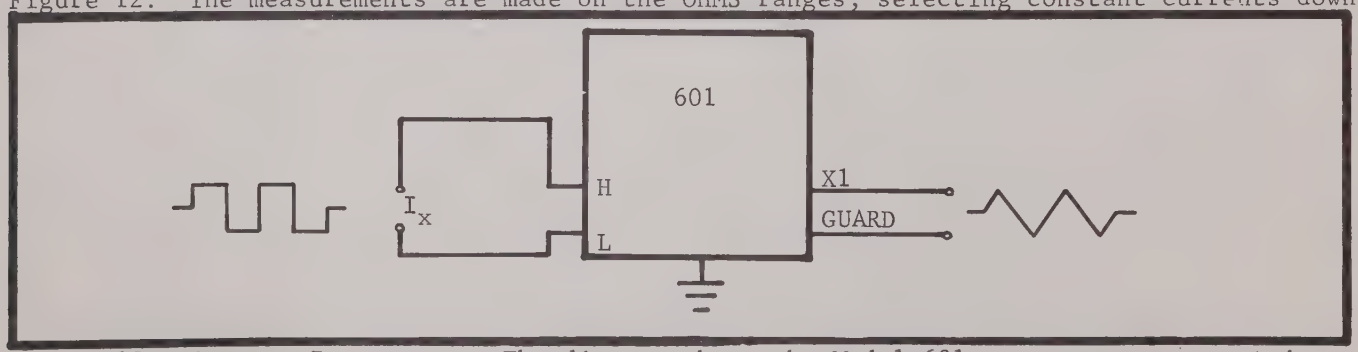

FIGURE 10. Current Integrator. The diagram shows the Model 601 acting as a current integrator. A square wave from a current source, I_X, is applied to the Model 601 input. Using the BOULOMBS ranges, the output through the unity-gain terminals is shown.

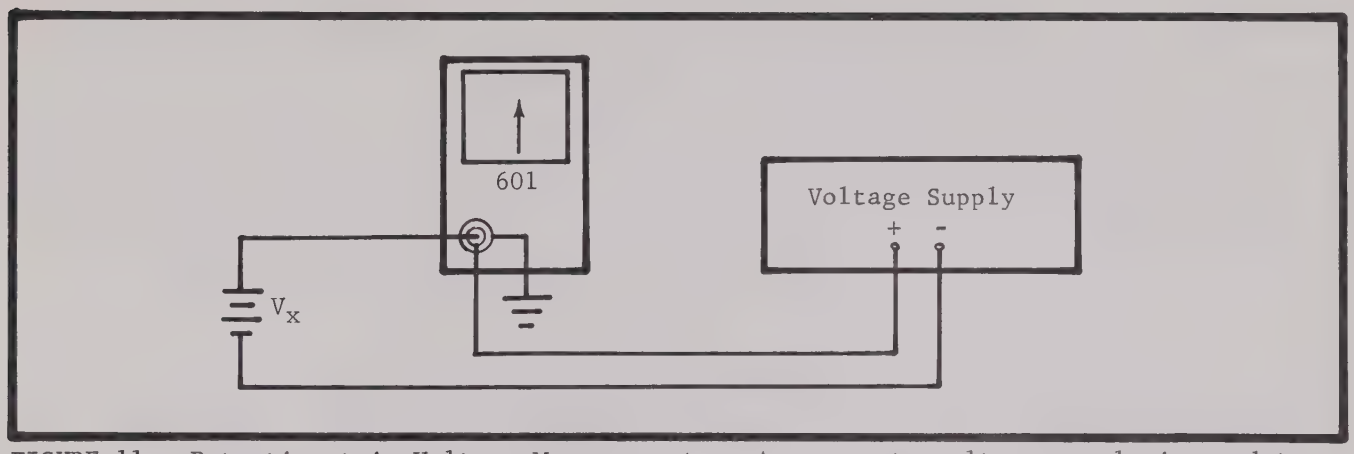

FIGURE 11. Potentiometric Voltage Measurements. An accurate voltage supply is used to buck out the potential from the unknown source, V_x. The Model 601 on the voltage ranges and center-zero scales acts as a null detector.

to 10^{-11} ampere in decade steps and reading the voltage drop across the diode. The characteristic curve can then be plotted in volts and amperes or in volts and ohms. The current polarity is positive out of the center terminal of the INPUT Receptacle. Read the voltage from the positive meter scale.

3-8. PEAK-READING VOLTMETER. The Model 601 easily converts to a peak-reading voltmeter. Set the Range Switch to the COULOMBS ranges and apply the input voltage to the INPUT Receptacle through an external diode. In the circuit shown in Figure 13, if the input resistance (R_i) and diode leakage resistance (R_d) are high and if the time constant of the RC combination is high compared to the period of the signal, the capacitor will charge to the peak value of the applied ac voltage minus the small drop across the diode. The Model 601 input resistance on the VOLTS or COULOMBS ranges is 10^{14} ohms or greater, and may therefore be neglected compared to the leakage resistance of most diodes. The capacitor (C) is selected using the COULOMBS ranges with the FEEDBACK Switch in the NORMAL position. C in farads is equal to the COULOMBS range setting.

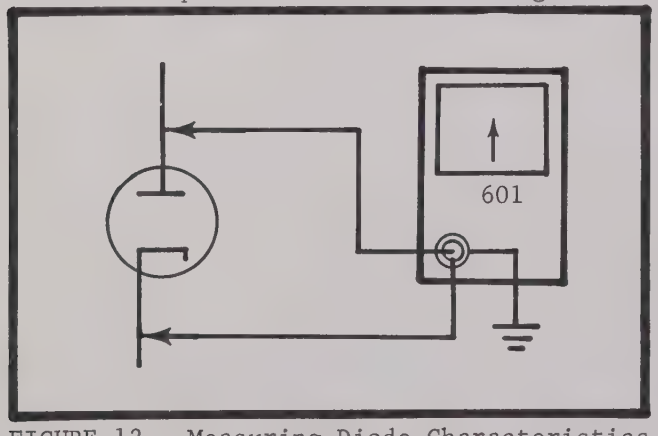

FIGURE 12. Measuring Diode Characteristics with Model 601. Use the OHMS ranges of the Electrometer.

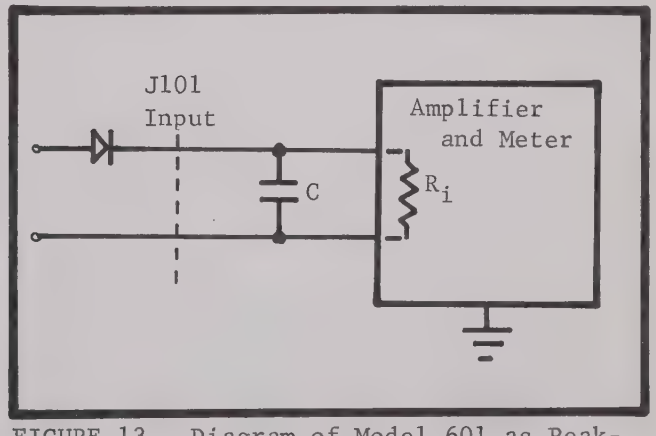

FIGURE 13. Diagram of Model 601 as Peak-Reading Voltmeter. Use the COULOMBS ranges. The diode is external to the voltmeter. C is the capacitor selected with the Range Switch; R_i is the Model 601 input resistance.

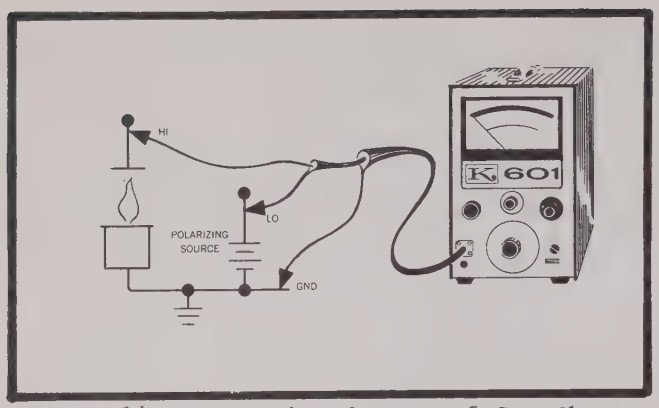

FIGURE 14. Measuring Output of Gas Chromatograph. The Model 601 is useful as a sensitive current detector in a gas chromatograph. Floating the Electrometer permits grounding the polarizing power source and flame column.

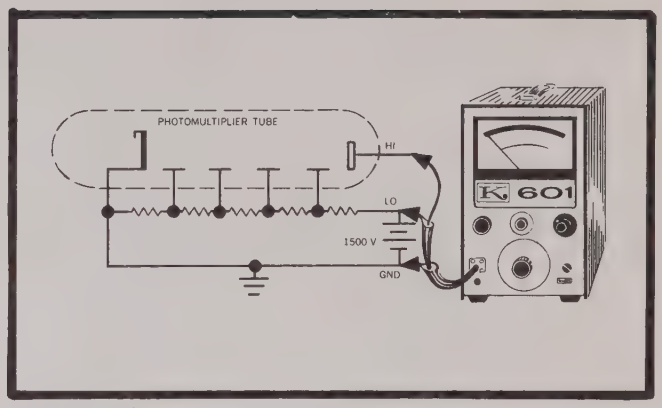

FIGURE 15. Monitoring Anode of Photomultiplier. The Model 601 permits monitoring the anode current of a photomultiplier where both the cathode and power supply must be grounded. With its case grounded, all Model 601 front panel controls are also at ground.

SECTION 7. ACCESSORIES

7-1. MODEL 6011 INPUT CABLE (Figure 29). The Model 6011 Cable has 30 inches of low-noise triaxial cable with a mating plug (Keithley Part CS-141), which connect directly to the Model 601 INPUT Receptacle. Three alligator clips are on separate leads for three-terminal connections. Refer to Table 1 Page 7 for color coding. One Model 6011 Cable is furnished with each Model 601.

7-2. MODEL 1531 GRIPPING PROBE (Figure 30). The Model 1531 has a gripping probe and 3-foot triaxial cable. Its insulation resistance is 10^{10} ohms. The gripping feature is useful for attaching the probe at a single point for repeated measurements. The cable is terminated by a special triaxial type plug (Keithley Part CS-141). The plug connects directly into the Model 601 INPUT Receptacle. Do not use the Probe for measurements that are more than 500 volts off ground.

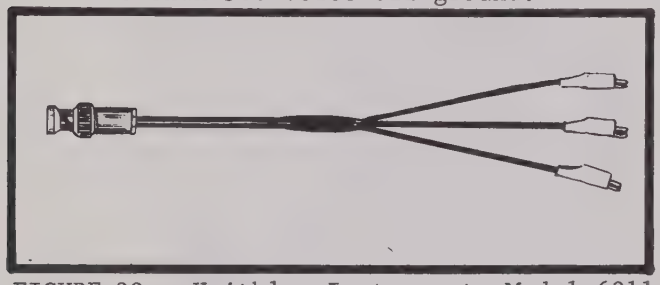

FIGURE 29. Keithley Instruments Model 6011 Input Cable.

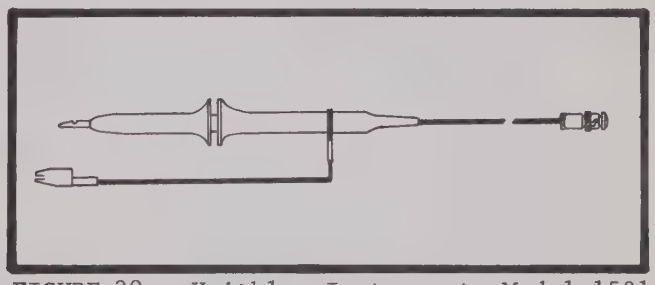

FIGURE 30. Keithley Instruments Model 1531 Gripping Probe.

7-3. MODEL 6301 GUARDED PROBE (Figure 31). The Model 6301 is a guarded probe and shielded lead. Insulation resistance is more than 10^{14} ohms. It consists of a probe and 3 feet of low-noise cable, terminated by a special triaxial type plug (Keithley Part CS-141). The plug connects directly into the Model 601 INPUT Receptacle. Using the Model 6301 allows point-by-point guarded measurements.

7-4. MODEL 6012 TRIAXIAL-TO-COAXIAL ADAPTER (Figure 32). The Model 6012 permits using the Model 601 with all Keithley electrometer accessories having uhf type connectors. Paragraphs 7-5 through 7-9 describe these accessories. One end of the Adapter is equivalent to a Keithley CS-141 plug and the other is a uhf-type connector.

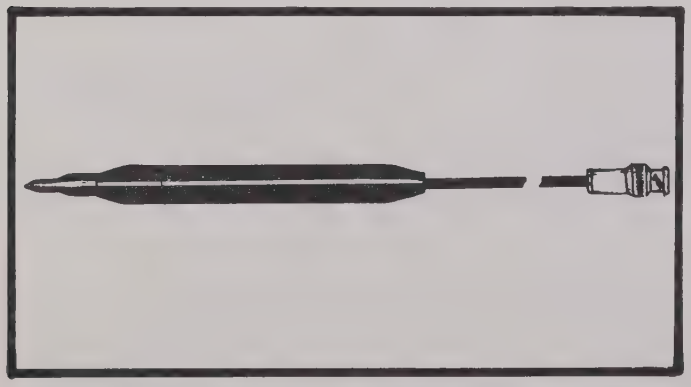

FIGURE 31. Keithley Instruments Model 6301 Guarded Probe.

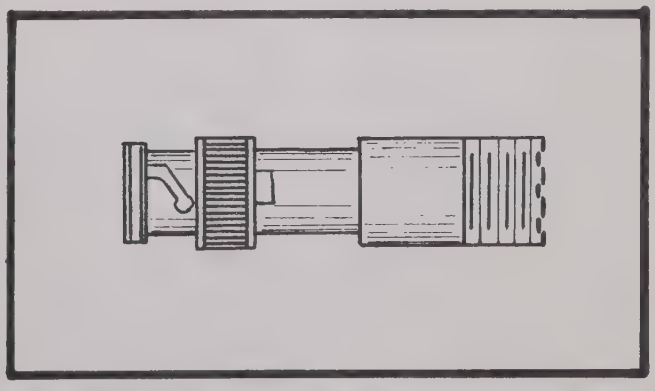

FIGURE 32. Keithley Instruments Model 6012 Triaxial-to-Coaxial Adapter.

NOTE

Do not make off-ground measurements with the Model 601 Electrometer when using the Model 6012 Adapter. The Adapter connects case ground and circuit low, defeating the Model 601 three-terminal input circuit. The chassis would be at the same off-ground potential as the voltage being measured.

7-5. MODEL 6102A VOLTAGE DIVIDER PROBE (Figure 33). The Model 6102A is a 10:1 voltage divider with an input resistance of 10^{10} ohms. It can be used with the Model 601 up to 100 volts with an accuracy of 3%. The Probe is furnished with 30 inches of low-noise coaxial cable, terminated with a uhf plug. Use the Model 6012 Adapter to connect the Probe to the Model 601 INPUT Receptacle. Instructions for using the Probe with the Electrometer are in paragraph 2-5.

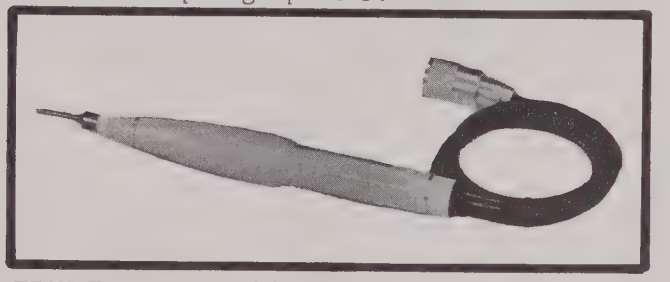

FIGURE 33. Keithley Instruments Model 6102A 10:1 Voltage Divider Probe.

FIGURE 34. Keithley Instruments Model 6103A 1000:1 Voltage Divider Probe.

7-6. MODEL 6103A VOLTAGE DIVIDER PROBE (Figure 34). The Model 6103A is a 1000:1 voltage divider with an input resistance of 10^{12} ohms. It can be used with the Model 601 up to 10 kilovolts with an accuracy of 5%. The Probe is furnished with 30 inches of low-noise coaxial cable, terminated with a uhf plug. Use the Model 6012 Adapter to connect the Probe to the Model 601 INPUT Receptacle. Instructions for using the Probe with the Electrometer are in paragraph 2-5.

7-7. MODEL 6104 TEST SHIELD.

a. The Model 6104 facilitates resistance measurements with either 2-terminal or 3-terminal guarded connections, as well as voltage and current tests.

b. 2-Terminal Operation.

1. Connect the high impedance side of the test sample to the Model 6104 INPUT Terminal. Connect the low impedance side to either black jack marked GROUND, whichever is more convenient.

2. Lock the enclosure and connect the Model 6104 bnc receptacle to the Model 601 INPUT Receptacle, using the Model 6012 Adapter. Use a short coaxial cable. Operate the Model 601 as described in Section 2.

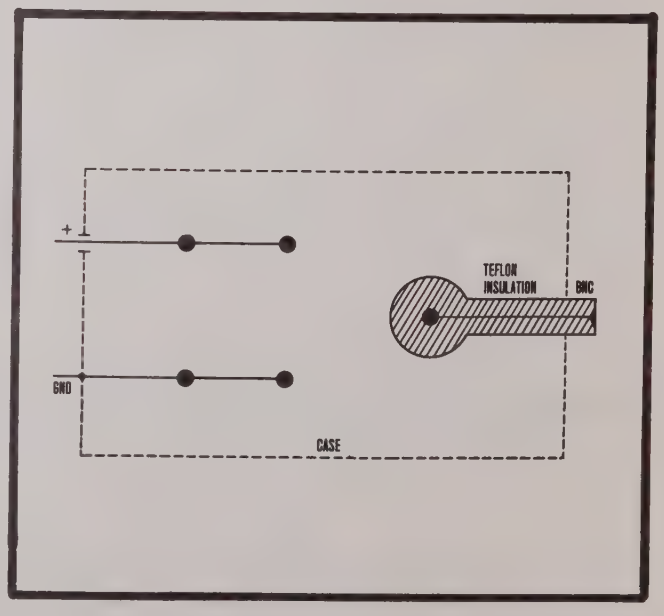

FIGURE 35. Diagram of Model 6104 Circuit.

c. 3-Terminal Operation.

1. For guarded measurements, make the connections as above with some additional steps.

2. Connect the Model 6104 black external plug to the Model 601 OHMS GUARD Terminal.

3. Connect either Terminal marked EXTERNAL SOURCE to the test sample at its high impedance side. Lock the enclosure and connect the Model 6104 to the Electrometer.

4. Connect an external voltage supply to the banana plugs on the side of the Model 6104, positive to red and negative to black. Set the external source (such as the Keithley Model 240A High Voltage Supply) to the desired voltage. Operate the Electrometer as explained in Section 2.

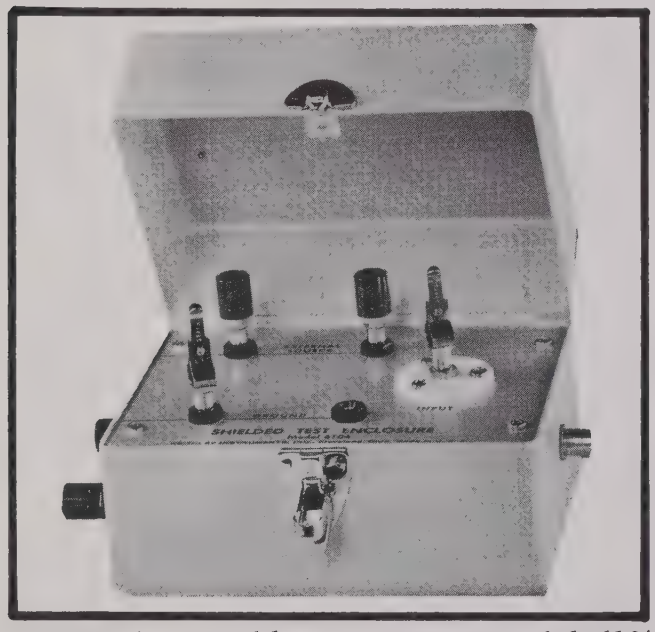

FIGURE 36. Keithley Instruments Model 6104 Test Shield.

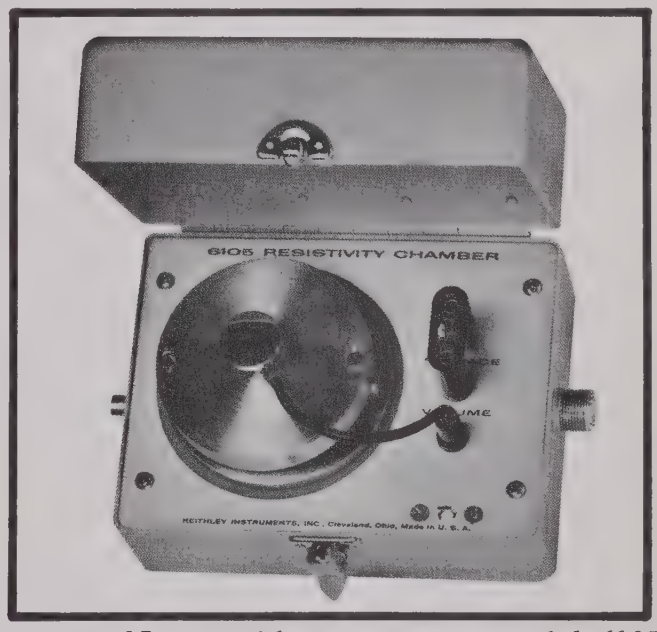

FIGURE 37. Keithley Instruments Model 6105 Resistivity Adapter.

7-8. MODEL 6105 RESISTIVITY ADAPTER.

a. The Model 6105 is a guarded test fixture for measuring resistivities of materials in conjunction with the Model 601 and the Model 240A High Voltage Supply. The complete system directly measures volume resistivities up to 3×10^{19} ohm-cm and surface resistivities up to 10^{18} ohms, in accordance with the procedures of the American Society for Testing and Materials. The shielded Model 6105 is a means for maintaining good sample contact with uniform pressure. The Adapter holds samples up to 4 inches in diameter and .25 inch thick. Maximum excitation voltage is 1000 volts.

b. The Model 6105 Instruction Manual explains the operating procedures for the system, using the Model 240A and an Electrometer.

c. The Model 601 can also be used with the Model 6105 alone. Operate the Model 601 as a constant current source (paragraph 3-2) with the FEEDBACK Switch in FAST position. Connect the OHMS GUARD Terminal on the rear panel to the center terminal of the Model 6105

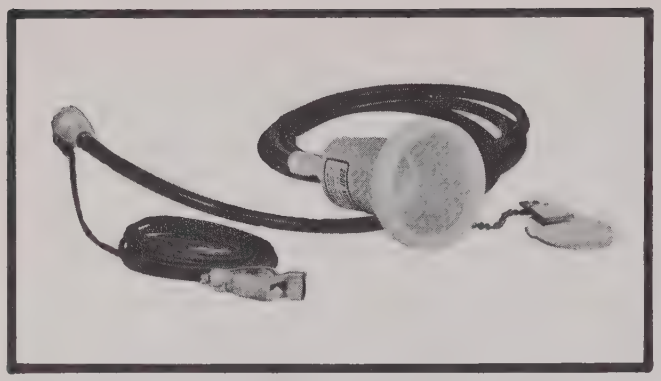

FIGURE 38. Keithley Instruments Model 2501 Static Detector Probe.

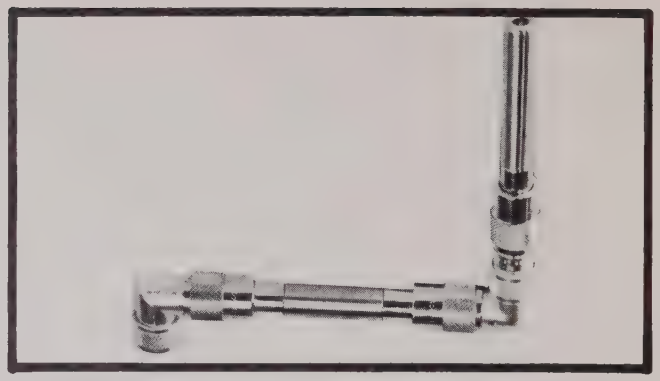

FIGURE 39. Keithley Instruments Model 2503 Static Detector Probe.

Power Receptacle. Other operating procedures are as for the 3-instrument system. The current from the Model 601 is the reciprocal of the OHMS setting of the Range Switch; the voltage is the Multiplier Switch setting times the meter reading.

7-9. MODELS 2501 AND 2503 STATIC DETECTOR PROBES.

a. The Model 2501 is a 10,000:1 capacitive divider when used with the head 3/8 inch from the charged surface. Measurements are accurate within 10%. The Model 2501 consists of a 3-inch diameter head and 10 feet of cable. Connect the Probe to the Model 601 INPUT Receptacle using the Model 6012 Adapter.

b. The Model 2503 is similar to the Model 2501. However, its head is 1/2 inch in diameter and it connects directly into the Electrometer — with the Model 6012 Adapter — without any cable.

7-10. RACK MOUNTING (See Figure 40).

a. The Model 601 is shipped for bench use. The Model 4005 Rack Mounting Kit converts the instrument to rack mounting to the standard EIA 19-inch width.

b. To convert the Model 601, remove the four screws at the bottom of each side of the instrument case. Lift off the top cover assembly with the handles; save the four screws. To remove the feet and tilt bail from the bottom cover assembly, remove the four screws and allow it to drop off. Remove the feet and tilt bail and replace the bottom cover using the same screws.

Item (See Fig. 40)	Description	Keithley Part No.	Quantity
1	Cover Assembly		1
2	Mounting Panel	19396B	1
3	Filler Panel	19397B	1
--	Screw, No. 10 - 3/8, HSS	Coml	12
--	Kep Nut, No. 10	Coml	8

TABLE 8. Parts List for Keithley Model 4005 Rack Mounting Kit.

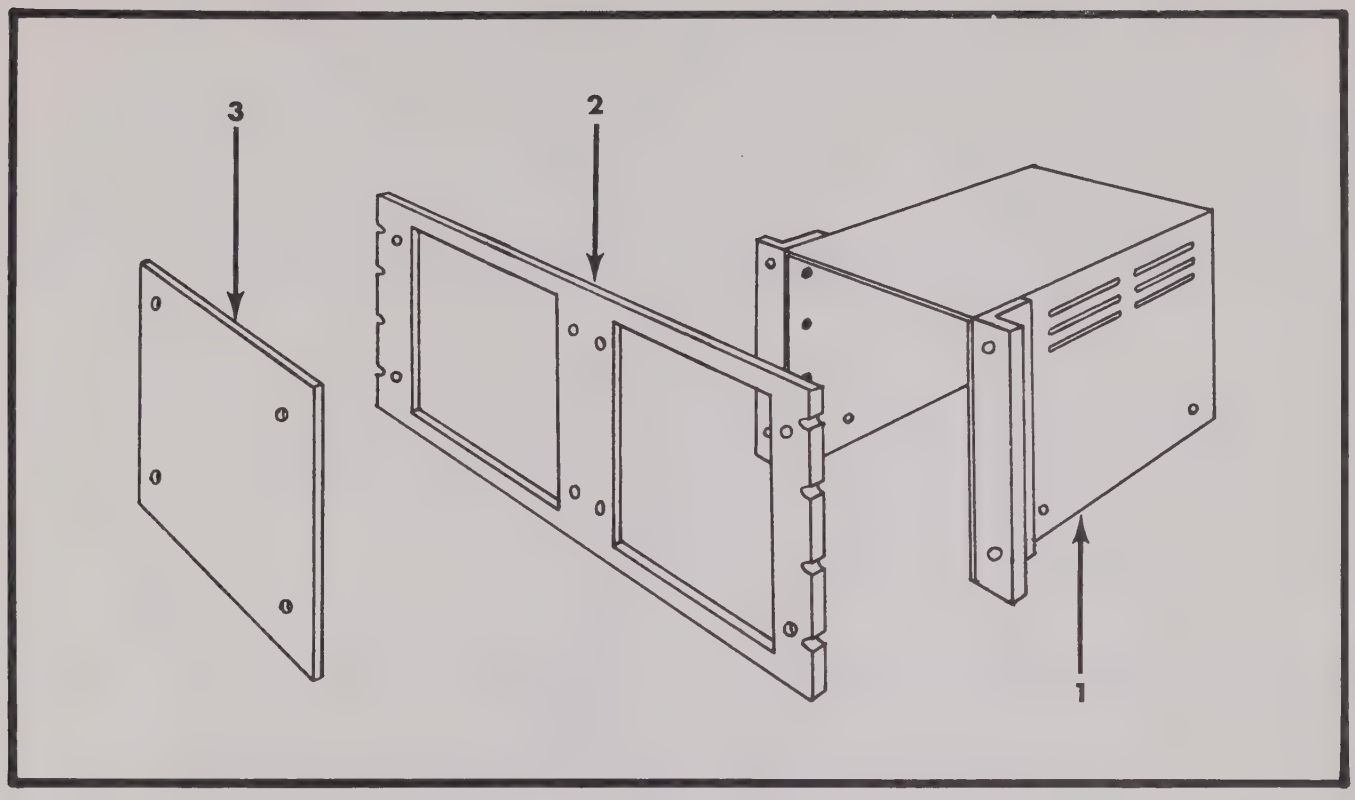

FIGURE 40. Exploded View of Model 4005 Rack Mounting Kit. Refer to Table 7 for parts list.

c. Insert the top cover assembly (1) in place and fasten to the chassis with the four screws previously removed. Attach the mounting panel (2) to the rack with four #10 screws and kep nuts. Fasten the Model 601 to the mounting panel with four #10 screws. Fasten the filler panel (3) to the opening in the mounting panel with four #10 screws and kep nuts.

d. If two Model 601 Electrometers are to be rack mounted side-by-side, another top cover assembly (Keithley Part 19525B) is used instead of item 1 in Figure 40. The filler panel (3) is not used. This Kit will also hold any two Keithley models whose bench dimensions are 10-1/2 inches high x 6-5/8 inches wide x 10 inches deep.

7-11. MODEL 6013 pH ELECTRODE ADAPTER.

a. The Model 6013 is designed to allow accurate and convenient pH potential measurements with the Model 601 Electrometer. It accepts Leeds & Northrop, Coleman and Beckman pH electrode connectors. The Adapter uses Teflon insulation and is fully guarded to insure that the accuracy of the Model 601 is affected in no way.

b. The top of the Model 6013 contains two sets of connectors to accept electrodes from the three named manufacturers. Connect the electrodes to the proper set. Connect the Adapter cable directly into the Model 601 INPUT Receptacle.

c. Make sure the switch on the Adapter is set for 601. Set the Model 601 METER Switch to CENTER ZERO. Set the Range Switch to VOLTS. Use the appropriate range for the Multiplier Switch.

NOTE

To check zero on the Electrometer, use only the ZERO CHECK Button on the Model 6013 pH Electrode Adapter. Do not use the ZERO CHECK Button on the Electrometer.

d. For guarded measurements, connect the GUARD Terminal on the Adapter to the Model 601 OHMS GUARD Terminal.

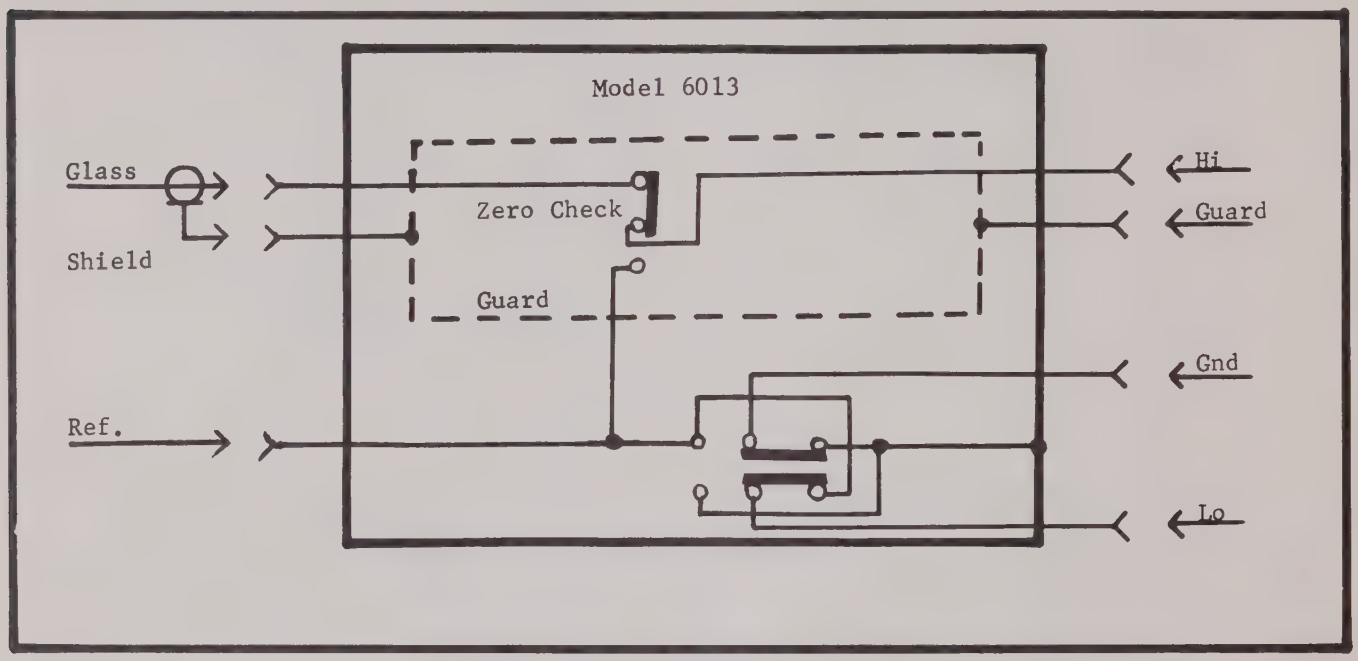

FIGURE 41. Block Diagram of Model 6013 in use with the Model 601.

FIGURE 42. Model 6013 pH Electrode Adapter Connected to pH Electrodes. Model 601 is used here with the Model 6013.

SECTION 8. REPLACEABLE PARTS

8-1. REPLACEABLE PARTS LIST. The Replaceable Parts List describes the components of the Model 601. The List gives the circuit designation, the part description, a suggested manufacturer, the manufacturer's part number and the Keithley Part Number. The last column indicates the figure picturing the part. The name and address of the manufacturers listed in the "Mfg. Code" column are in Table 10.

8-2. HOW TO ORDER PARTS.

a. For parts orders, include the instrument's model and serial number, the Keithley Part Number, the circuit designation and a description of the part. All structual parts and those parts coded for Keithley manufacture (80164) must be ordered through Keithley Instruments, Inc. or its representatives. In ordering a part not listed in the Replaceable Parts List, completely describe the part, its function and its location.

b. Order parts through your nearest Keithley representative or the Sales Service Department, Keithley Instruments, Inc.

amp	ampere	No.	Number
CerD	Ceramic, disc	Ω	ohm
Comp	Composition		
		p	pico (10^{-12})
DCb	Deposited Carbon	Poly	Polystyrene
ETB	Electrolytic, tubular	Ref.	Reference
		req'd	required
f	farad		
Fig.	Figure	μ	micro (10^{-6})
GCb	Glass enclosed carbon	v	volt
k	kilo (10^3)	w	watt
		WW	Wirewound
M or meg	mega (10^6) or megohms	WWVar	Wirewound Variable
Mfg.	Manufacturer		
MtF	Metal Film		
My	Mylar		

TABLE 9. Abbreviations and Symbols.

MODEL 601 REPLACEABLE PARTS LIST

(Refer to Schematic Diagram 19428E for circuit designations.)

BATTERIES

Circuit Desig.	Description	Mfg. Code	Mfg. Part No.	Keithley Part No.	Fig. Ref.
B201	1.35v mercury	72665	RM42R	BA-10	22, 23
B202	1.35v mercury	72665	RM42R	BA-10	22, 23
B203	8.4v mercury	72665	TR-286	BA-18	22, 23
B204	8.4v mercury	72665	TR-286	BA-18	22, 23
B205	8.4v mercury	72665	TR-286	BA-18	22, 23
B206	9v zinc carbon	09823	2N6	BA-17	22, 23
B207	9v zinc carbon	09823	2N6	BA-17	22, 23
B208	9v zinc carbon	09823	2N6	BA-17	22, 23
B209	9v zinc carbon	09823	2N6	BA-17	22, 23

CAPACITORS

Circuit Desig.	Value	Rating	Type	Mfg. Code	Mfg. Part No.	Keithley Part No.	Fig. Ref.
C101	22 pf	600 v	CerD	72982	ED-22	C22-22P	28
C102	125 µf	15 v	ETB	73445	C462	C3-125M	22
C103	.001 µf	500 v	Poly	71590	CPR-1000J	C138-.001M	28
C104	150 pf	500 v	Poly	71590	CPR-150J	C138-150P	28
C105	150 pf	500 v	Poly	71590	CPR-150J	C138-150P	28
C106	5 pf	200 v	Poly	14167	E1013-1	C31-5P	26
C107	0.1 µf	200 v	Poly	84171	2PJ-104G	C108-.1M	27
C108	.01 µf	200 v	Poly	84171	2PJ-103G	C108-.01M	27
C109	.001 µf	200 v	Poly	84171	2PJ-102G	C108-.001M	27
C110	100 pf	500 v	Poly	71590	2PJ-101G	C108-100P	27
C111	22 pf	600 v	CerD	72982	ED-27	C22-22P	23
C112	0.1 µf	50 v	My	84411	601 PE	C41-.1M	25
C113	680 pf	600 v	CerD	72982	ED-680	C22-680P	25
C114	0.1 µf	50 v	Mr	84411	601 PE	C41-.1M	22
C115	.02 µf	600 v	CerD	72982	ED-.02	C22-.02M	24
C116	.001µf	600 v	CerD	72982	ED-.001	C22-.001M	22

MISCELLANEOUS PARTS

Circuit Desig.	Description	Mfg. Code	Keithley Part No.	Fig. Ref.
----	Battery holder, 2 req'd	80164	19100A	---
----	Battery holder, 3 req'd	80164	19101A	---
----	Battery holder, 4 req'd	80164	BH-6	---
----	Battery retain clips, 6 req'd	80164	BH-22	---

MISCELLANEOUS PARTS (Con't)

Circuit Desig.	Description	Mfg. Code	Keithley Part No.	Fig. Ref.
D201	Silicon diode (Number 1N645)	01295	RF-14	24
D202	Silicon diode (Number 1N645)	01295	RF-14	24
D203	Silicon diode (Number 1N645)	01295	RF-14	24
J101	Receptacle, triaxial, INPUT (Mfg. No. 33050-1)	95712	CS-181	22, 2
----	Plug, triaxial, mate of J101 (Mfg. No. 30197-1)	95712	CS-141	---
J102	Binding Post, LO (Mfg. No. DF21B)	58474	BP11-B	22, 2
J103	Receptacle, Microphone, OUTPUT (Mfg. No. 80-PC2F)	02660	CS-32	23, 3
---- (F)	Plug, Microphone, mate of J103 (Mfg. No. 80-MC2M)	02660	CS-33	---
J104	Binding Post, CASE GROUND(Mfg. No. DF21BLU)	58474	BP11-BLU	22, 3
J105	Binding Post, X1 OUTPUT (Mfg. No. DF21R)	58474	BP11-R	22, 3
J106	Binding Post, GUARD (Mfg. No. DF21G)	58474	BP11-G	22, 3
J107	Binding Post, LO (Mfg. No. DF21B)	58474	BP11-B	3,22,23
M101	Meter	80164	ME-53A	22
S101	Rotary Switch less components, Range	80164	SW-204	22, 2
----	Rotary Switch with components, Range	80164	19257B	---
----	Dial Assembly, Range	80164	17033A	---
S102	Push Button, ZERO CHECK	80164	14376A	23, 2
----	Knob Assembly, Zero Check	80164	18038A	---
S103	Rotary Switch less components, COARSE ZERO	80164	SW-166	22, 3
----	Rotary Switch with components, Coarse Zero	80164	19283B	---
S104	Rotary Switch less components, MEDIUM ZERO	80164	SW-209	22, 2
----	Rotary Switch with components, Medium Zero	80164	19261B	---
S105	Slide Switch, FEEDBACK	80164	19089A	23, 2
S106	Rotary Switch less components, Multiplier	80164	SW-205	22, 2
----	Rotary Switch with components, Multiplier	80164	19263B	---
----	Dial Assembly, Multiplier	80164	19223A	---
S107	Rotary Switch, METER	80164	SW-206	23, 2
----	Knob Assembly, Meter	80164	14825A	---
S108	Slide Switch, OUTPUT	80164	SW-45	23, 3
----	Knob Assembly, Fine Zero Control	80164	16995A	---

(F) Furnished Accessory

RESISTORS

Circuit Desig.	Value	Rating	Type	Mfg. Code	Mfg. Part No.	Keithley Part No.	Fig. Ref.
R101	10 MΩ	10%, 1/2 w	Comp	01121	EB	R1-10M	28
R102	10 Ω	1%, 10 w	WW	91637	RS-10	R34-10	27, 28
R103	100 Ω	1%, 10 w	WW	91637	RS-10	R34-100	27, 28
R104	1 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-1K	28
R105	10 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-10K	28
R106	100 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-100K	28
R107	1 MΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-1M	28
R108	10 MΩ	10%, 1 w	DCb	91637	DC-1	R13-10M	28
R109	100 MΩ	1%, 2 w	DCb	91637	D-2	R14-100M	26, 28
R110	10^9 Ω	+3-0%, 1/R w	GCb	63060	RX-1	R20-10^9	26
R111	10^{10} Ω	+3-0%, 1/R w	GCb	63060	RX-1	R20-10^{10}	26
R112	10^{11} Ω	+3-0%, 1/R w	GCb	63060	RX-1	R20-10^{11}	26
R113	800 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-800K	27
R114	10 MΩ	10%, 1/2 w	Comp	01121	EB	R1-10M	23
R115	10 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-10K	23
R116	2.2 kΩ	10%, 1/2 w	Comp	01121	EB	R1-2.2K	25
R117	150 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-150K	25
R118	150 kΩ	1%, 1/2 w	MtF	07716	CEC	R94-150K	25
R119	10 kΩ	5%, 2 w	WWVar	12697	62JA	RP42-10K	22, 2
R120	1.2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-1.2K	22
R121	150 kΩ	1%, 1/2 w	MtF	07716	CEC	R94-150K	25
R122	15 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-15K	25
R123	68 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-68K	25
R124	450 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-450K	25
R125	450 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-450K	25
R126	100 kΩ	10%, 1/2 w	Comp	01121	EB	R1-100K	25
R127	15 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-15K	25
R128	68 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-68K	25
R129	15 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-15K	22
R130	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R131	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R132	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R133	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R134	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R135	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R136	2 kΩ	1%, k/2 w	DCb	79727	CFE-15	R12-2K	22
R137	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R138	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R139	2 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-2K	22
R140	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22

RESISTORS (Con't)

Circuit Desig.	Value	Rating	Type	Mfg. Code	Mfg. Part No.	Keithley Part No.	Fig. Ref.
R141	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R142	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R143	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R144	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R145	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R146	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R147	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R148	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R149	402 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-402	22
R150	15 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-15K	22
R151	10 kΩ	10%, 1/2 w	Comp	01121	EB	R1- 10K	25
R152	80 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-80K	25
R153	80 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-80K	25
R154	1.5 kΩ	10%, 1/2 w	Comp	01121	EB	R1-1.15K	--
R155	3.3 kΩ	10%, 1/2 w	Comp	01121	EB	R1-3.3K	--
R156	3.3 kΩ	10%, 1/2 w	Comp	01121	EB	R1-3.3K	25
R157	22 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-22K	--
R158	22 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-22K	--
R159	25 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-25K	--
R160	12 kΩ	10%, 1/2 w	Comp	01121	EB	R1-12K	--
R161	1.8 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-1.8K	--
R162	9.1 kΩ	0.5%, 1/2 w	MtF	07716	CBC	R61-9.1K	22
R163	2.73 kΩ	0.5%, 1/2 w	MtF	07716	CBC	R61-2.73K	22
R164	910 Ω	0.5%, 1/2 w	MtF	07716	CBC	R61-910	22
R165	273 Ω	0.5%, 1/2 w	MtF	07716	CBC	R61-273	22
R166	91 Ω	0.5%, 1/2 w	MtF	07716	CBC	R61-91	22
R167	27.3 Ω	0.5%, 1/2 w	MtF	07716	CBC	R61-27.3	22
R168	9.1 Ω	0.5%, 1/4 w	WW	01686	T-2A	R123-9.1	22
R169	2.73 Ω	0.5%, 1/4 w	WW	01686	T-2A	R123-2.73	22
R170	.91 Ω	0.5%, 1/4 w	WW	01686	T-2A	R123-.91	22
R171	8.6 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-8.6K	23
R172	20 kΩ	10%, 5 w	WWVar	71450	AW	RP34-20K	23, 3
R173	910 Ω	0.1%, 1/4 w	WW	01686	7009	R95-910	23
R174	10 Ω	10%, 1/4 w	Comp	01121	CB	R76-10	--
R175	470 Ω	10%, 1/2 w	Comp	01121	EB	R1-470	22
R176	10 Ω	10%, 1/4 w	Comp	01121	CB	R76-10	--
R201	1 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-1K	24
R202	9 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-9K	24
R203	70 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-70K	24
R204	10 kΩ	10%, 5 w	WWVar	71450	AW	RP3-10K	23
R205	180 kΩ	10%, 1/2 w	Comp	01121	EB	R1-180K	24

RESISTORS (Con't)

Circuit Desig.	Value	Rating	Type	Mfg. Code	Mfg. Part No.	Keithley Part No.	Fig. Ref.
R206	820 Ω	10%, 1/2 w	Comp	01121	EB	R1-820	24
R207	820 Ω	10%, 1/2 w	Comp	01121	EB	R1-820	24
R208	39 kΩ	10%, 1/2 w	Comp	01121	EB	R1-39K	24
R209	180 kΩ	10%, 1/2 w	Comp	01121	EB	R1-180K	24
R210	1 kΩ	1%, 1/2 w	DCb	79727	CFE-15	R12-1K	24
R211	500 Ω	10%, 5 w	WWVar	71450	AW	RP3-500	24
R212	180 kΩ	10%, 1/2 w	Comp	01121	EB	R1-180K	24
R213	330 Ω	10%, 1/2 w	Comp	01121	EB	R1-330	24
R214	15 kΩ	10%, 1/2 w	Comp	01121	EB	R1-15K	24
R215	120 kΩ	10%, 1/2 w	Comp	01121	EB	R1-120K	24
R216	330 Ω	10%, 1/2 w	Comp	01121	EB	R1-330	24
R217	15 kΩ	10%, 1/2 w	Comp	01121	EB	R1-15K	24
R218	120 kΩ	10%, 1/2 w	Comp	01121	EB	R1-120K	24
R219	500 Ω	1%, 1/2 w	DCb	79727	CFE-15	R12-500	24
R220	2 kΩ	10%, 5 w	WWVar	71450	AW	RP34-2K	24

TRANSISTORS

Circuit Desig.	Number	Mfg. Code	Keithley Part No.	Fig. Ref.
Q101	A1380	80164	TG-32	25
Q102	A1380	80164	TG-32	25
Q103	A1380	80164	TG-32	25
Q104	A1380	80164	TG-32	25
Q105	S17638	07263	TG-33	25
Q106	S17638	07263	TG-33	25
Q201	A1380	73445	TG-32	24
Q202	2N1605	93332	TG-22	24
Q203	2N1381	01295	TG-8	24
Q204	S17638	07263	TG-33	24
Q205	S17638	07263	TG-33	24
Q206	S17638	07263	TG-33	24

VACUUM TUBES

Circuit Desig.	Number	Mfg. Code	Keithley Part No.	Fig. Ref.
V101	5886	80164	**EV-5886-3P	23
V102	5886	80164	**EV-5886-3P	23

** Replace V101 and V102 as a pair.

01121	Allen-Bradley Corp. Milwaukee, Wis.	71450	CTS Corp. Elkhart, Ind.
01295	Texas Instruments Inc. Semi Conductor-Components Division Dallas, Texas	71590	Centralab Division of Globe-Union, Inc. Milwaukee, Wis.
01686	RCL Electronics, Inc. Riverside, N. J.	72665	Mallory Battery Co. Cleveland, Ohio
02660	Amphenol-Borg Electronics Corp. Broadview, Chicago, Illinois	72982	Erie Technological Products, Inc. Erie, Pa.
07263	Fairchild Camera & Instrument Corp. Semiconductor Division Mountain View, Cal.	73445	Amperex Electronic Co. Division of North American Philips Co., Inc. Hicksville, N. Y.
07716	International Resistance Co. Burlington, Iowa	79727	Continental-Wirt Electronics Corp. Philadelphia, Pa.
09823	Burgges Battery Co. Freeport, Ill.	80164	Keithley Instruments, Inc. Cleveland, Ohio
12697	Clarostat Mfg. Co., Inc. Dover, N. H.	84171	Arco Electronics, Inc. Great Neck, N. Y.
14167	Efcon, Inc. Garden City, Long Island, N. Y.	84411	Good-All Electric Mfg. Co. Ogallala, Nebr.
56289	Sprague Electric Co. North Adams, Mass.	91637	Dale Electronics, Inc. Columbus, Nebr.
58474	Superior Electric Co., The Bristol, Conn.	93332	Sylvania Electric Products, Inc. Semiconductor Products Division Woburn, Mass.
63060	Victoreen Instrument Co. Cleveland, Ohio	95712	Dage Electric Co., Inc. Franklin, Ind.

TABLE 10. Code List of Suggested Manufacturers. (Based on Federal Supply Code for Manufacturers, Cataloging Handbook H4-1.)

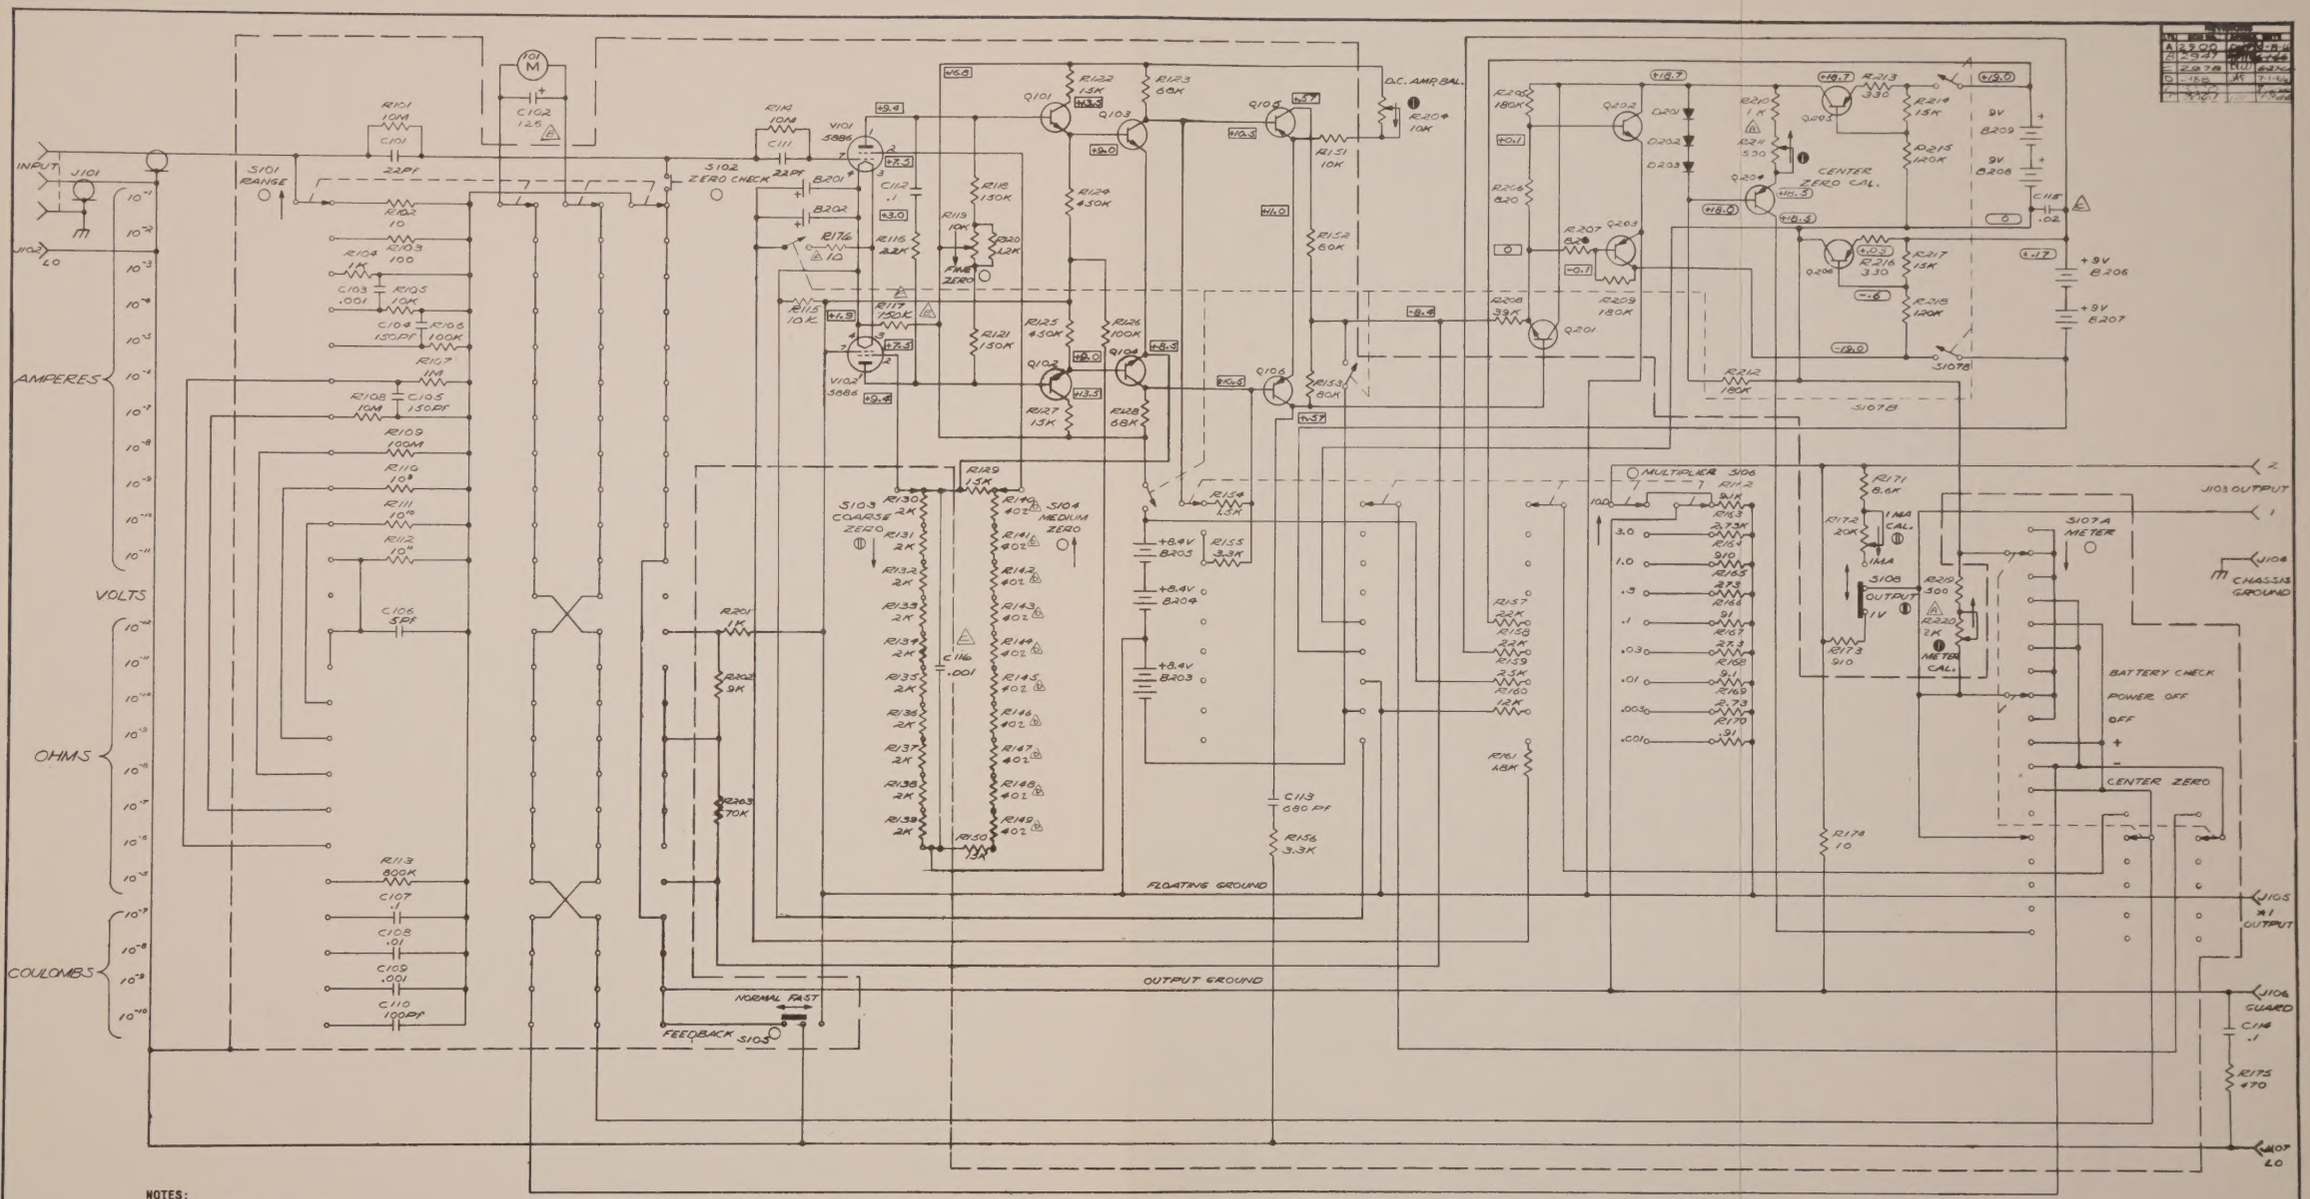

NOTES:

1) ○ FRONT PANEL ARTWORK
2) ◍ REAR PANEL SCREWDRIVER ADJUSTMENT
3) ◑ REAR PANEL CONTROL
4) ◐ INTERNAL SCREWDRIVER ADJUSTMENT
5) ✳ INDICATES NOMINAL VALUE ADJUSTED AT FACTORY.
6) ALL RESISTORS AND CAPACITORS ARE DESIGNATED IN OHMS AND MICROFARADS, UNLESS OTHERWISE NOTED.
7) K 1000 OHMS
8) pf PICOFARADS
9) M MEGOHMS
10) ↑ C.W. ROTATION
11) ═ VOLTAGES REFERRED TO FLOATING GROUND; ═ VOLTAGES REFERRED TO OUTPUT GROUND WITH 100M VTVM; RANGE SWITCH ON VOLTS; MULTIPLIER ON 1.0 METER ZEROED; FRESH BATTERIES INSTALLED.
12) S107b IS OPEN IN THE POWER OFF AND BATTERY CHECK POSITIONS OF S107a.

△ HIGHEST REFERENCE DESIGNATION					REFERENCE DESIGNATION NOT USED.					
△ R176	R220	C116	J107	M101						
S108	V102	Q106	Q206	Q203						
B208										

DRN F. PULIG	DATE 3-66	KEITHLEY INSTRUMENTS CLEVELAND, OHIO	TITLE SCHEMATIC 601
CKD R. MARWAIS	DATE 3/24/66		
ENG APPR C.J.A.R.	DATE 3-24-66	SUPERSEDES	PART NUMBER 19428
PILOT RELEASE	DATE	FINISH	
PROD RELEASE	DATE		

www.manualsplus.com
1009535

KEITHLEY INSTRUMENTS, INC.
12415 EUCLID AVENUE
CLEVELAND, OHIO 44106